


## Uponor Ecoflex Supra 50x4,6/140

**1095725**

- Cold potable water and cooling
- One medium pipe PE 100 RC black, SDR 11
- Max. load 16 bar / 20°C
- PEX foam, HDPE casing

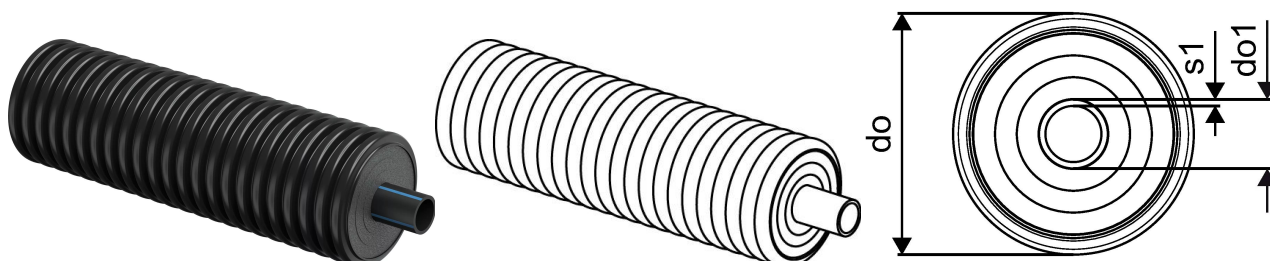

### About Uponor Ecoflex Supra

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Carrier pipe: Polyethylene PE100 RC, PN 16 (SDR 11) black with blue stripes
- Insulating material: Closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

#### Application

- Transport of cold potable or cooling water for buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- UK Reg4 approval
- WRAS or
  - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Ecoflex Supra 50x4,6/140

1095725



### Measurements

Bending radius M	0,6
Outer Diameter_do	140
Outer Diameter_do1	50
Wall thickness_s1	4,6

### Product code

Item no EAN	6414905485635
Item no GF	35001095725
Item no GTIN	06414905485635
Item no NRF	8361426

### Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,67
Item Unit Width	140
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905537914
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	334
Packaging Width PL1	1500

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)