


Uponor Ecoflex Supra 110x10,0/200

1095729

- Cold potable water and cooling
- One medium pipe PE 100 RC black, SDR 11
- Max. load 16 bar / 20°C
- PEX foam, HDPE casing

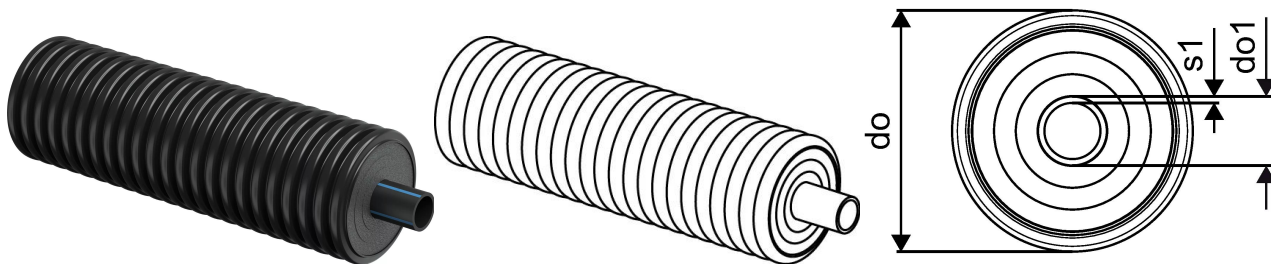

About Uponor Ecoflex Supra

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system
- Medium pipe: Polyethylene PE 100, PN 16 (SDR 11) black with blue layer and new in PE100 RC, PN 16 (SDR 11) black with blue stripes
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of cold potable or cooling water for buried installations.
- Operating temperature +20°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex Supra 110x10,0/200

1095729

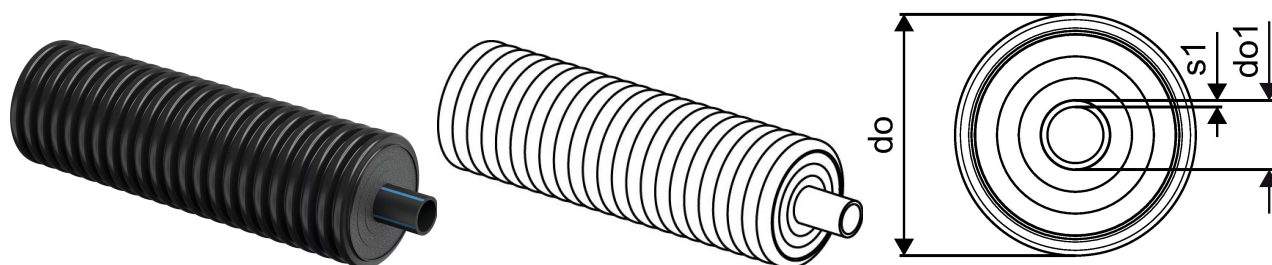

Technical data

Item no EAN	6414905486458
Item no GTIN	06414905486458
Item no NRF	8361431
Item (unit of measurement)	m
Bending radius 2	1,2 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414905537952
Item Unit Height	200 mm
Item Unit Weight	5,24 kg
Item Unit Width	200 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb