


Uponor RS adapter S-Press PLUS 25-RS2

1095819

- Made of tin-plated DZR brass
- Inspection windows on press sleeve
- Press indicator foils
- Fits into all RS2 base parts.

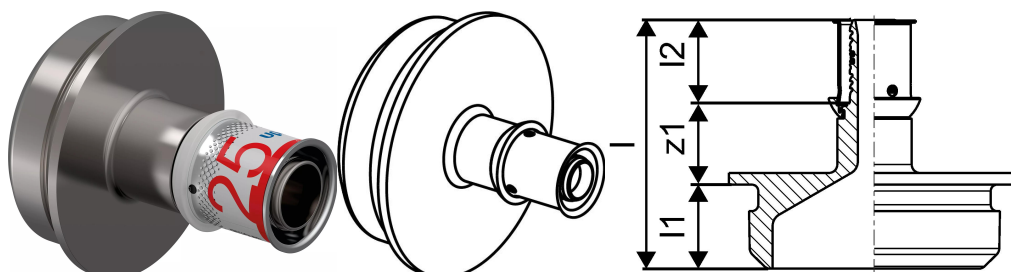

About Uponor RS adapter S-Press PLUS

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor RS adapter S-Press PLUS 25-RS2

1095819

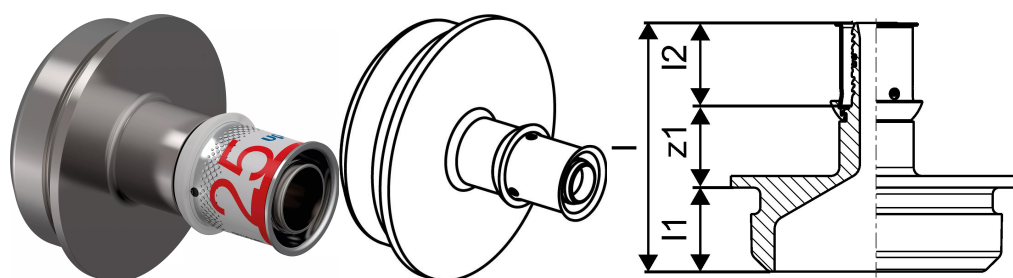

Product code

Item no EAN	6414905480128
Item no GF	35001095819
Item no GTIN	06414905480128
Item no LVI	1720818
Item no NRF	5071228
Item no RSK	1899575
Item no VVS	045450325

Dimensions

Item Unit Height	70
Item Unit Length	75
Item Unit Weight	0,36
Item Unit Width	70
Item_UOM	pce

Measurements

LENGTH_L	74,9
Length (l1)	20,1
Length (l2)	28,3
z1	26,5

Packaging

Packaging GTIN PL1	06414905481606
Packaging GTIN PL4	06414905555581
Packaging Height PL1	80
Packaging Height PL4	600
Packaging Length PL1	120
Packaging Length PL4	800
Packaging Quantity PL1	1
Packaging Quantity PL4	378

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00096
Packaging Volume PL4	0,576
Packaging Weight PL1	0,415
Packaging Weight PL4	176,87
Packaging Width PL1	100
Packaging Width PL4	1200

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb