


## Uponor Uni Pipe PLUS white 16x2,0 50m

**1096008**

- Coil
- High dimensional stability, low expansion rates
- Increased flexibility
- 100% oxygen barrier

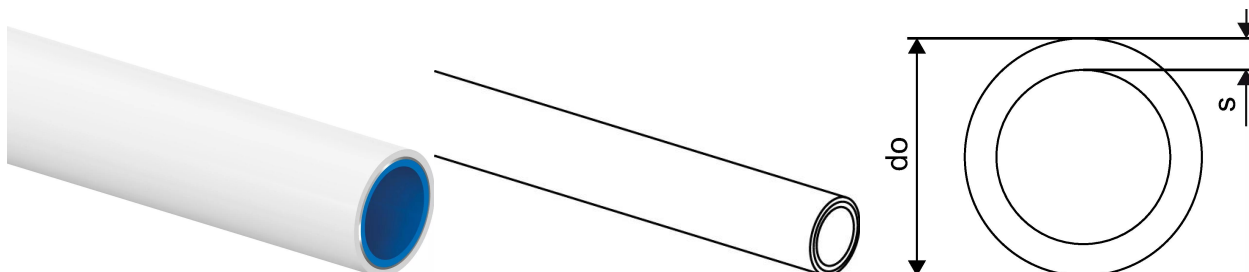

## About Uponor Uni Pipe PLUS white

### Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Uni Pipe PLUS white 16x2,0 50m

1096008

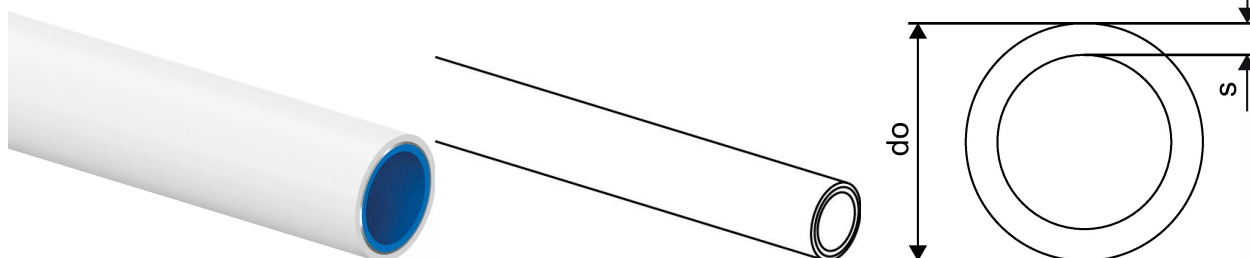

### Product code

Item no EAN	6414905480548
Item no GF	35001096008
Item no GTIN	06414905480548

### Dimensions

Item Unit Height	16
Item Unit Length	1000
Item Unit Weight	0,1170
Item Unit Width	16
Item_UOM	m

### Measurements

Outer Diameter_do	16
Wall thickness_s	2,0

### Packaging

Packaging GTIN PL1	06414905480968
Packaging GTIN PL4	06414905525539
Packaging Height PL1	130
Packaging Height PL4	2000
Packaging Length PL1	780
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL4	1000
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,079092
Packaging Volume PL4	1,92
Packaging Weight PL1	6,7479
Packaging Weight PL4	152,3578

Packaging Width PL1	780
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)