Product data sheet




GF Uponor Ecoflex Thermo connection set Twin HP 2x32x2,9-2x32x3,5/140 L=8m

1105778

- Point-to-point heat-pump connection pipe, heating and cooling

- Set includes
- Ecoflex Thermo Twin HP heating pipe - 2 x carrier pipes, 2 x cable conduits
- 6 bar at 80°C
- 2 Quattro rubber end caps
- 4 Couplings with male BSP 'R' type threads
- 30m of Trench warning tape
- Order on full pallet

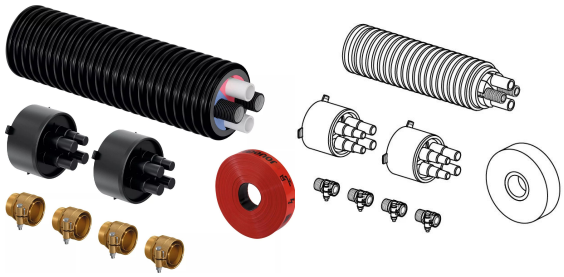

About GF Uponor Ecoflex Thermo connection set Twin HP

Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

Certification

-

GF Uponor Ecoflex Thermo connection set Twin HP 2x32x2,9-2x32x3,5/140 L=8m

1105778

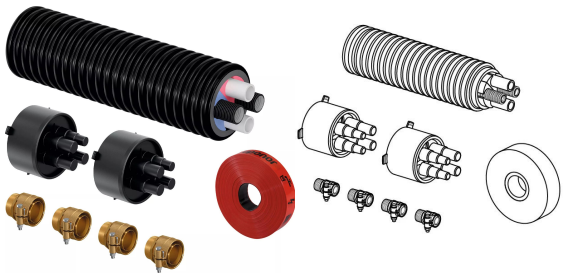

Product code

Item no EAN	6414905528769
Item no GTIN	06414905528769
Item no VVS	087808832

Dimensions

Item Unit Height	1550
Item Unit Length	1550
Item Unit Weight	22,8
Item Unit Width	300
Item_UOM	set

Packaging

Packaging GTIN PL1	06414905542819
Packaging GTIN PL4	06414905542826
Packaging Height PL1	1550
Packaging Height PL4	1800
Packaging Length PL1	1560
Packaging Length PL4	1600
Packaging Quantity PL1	1
Packaging Quantity PL4	4
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,7254
Packaging Volume PL4	3,456
Packaging Weight PL1	22,9
Packaging Weight PL4	116,6

Packaging Width PL1	300
Packaging Width PL4	1200

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+