
Product data sheet



GF Uponor S-Press sliding coupling 40-40

1118710

- Made of tin plated brass
- Extended press sleeve
- Can be used as a repair coupling
- Inspection windows on press sleeve
- Colour coded

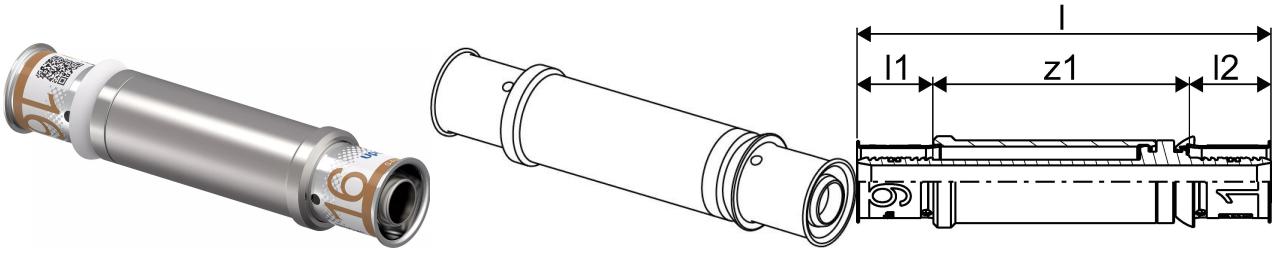

About GF Uponor S-Press sliding coupling

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press sliding coupling 40-40

1118710

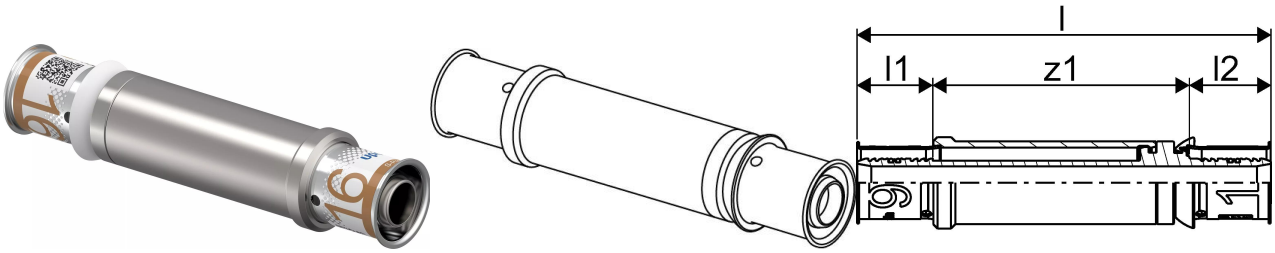

Product code

Item no EAN	6414905554942
Item no GF	35001118710
Item no GTIN	06414905554942
Item no LVI	1720840
Item no NRF	5071371
Item no RSK	1899734
Item no VVS	045484340

Dimensions

Item Unit Height	48
Item Unit Length	137
Item Unit Weight	0,523
Item Unit Width	48
Item_UOM	pce

Measurements

LENGTH_L	138
Length (l1)	42
Length (l2)	38
z1	58

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905559893
Packaging GTIN PL3	06414905559909
Packaging GTIN PL4	06414905559916
Packaging Height PL1	89

Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	3
Packaging Quantity PL3	12
Packaging Quantity PL4	576
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00211464
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	1,57
Packaging Weight PL3	6,3
Packaging Weight PL4	305
Packaging Width PL1	135
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+