
Product data sheet





GF Uponor Ecoflex house connection elbow Single 125x11,4/200

1118770

- For Ecoflex single carrier pipe systems
- Pre-insulated PE-Xa pipe elbow
- One medium pipe PE-Xa, SDR 11
- Max. Load 6bar / 80°C
- PUR foam, PE casing

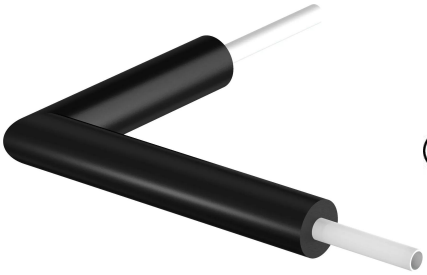

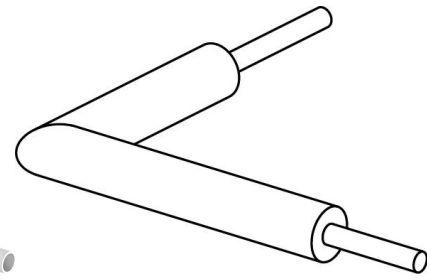

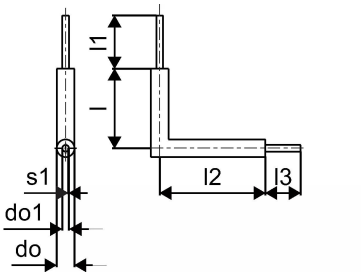

About GF Uponor Ecoflex house connection elbow Single

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed for all below ground buried installations


Certification


-

GF Uponor Ecoflex house connection elbow Single 125x11,4/200

1118770

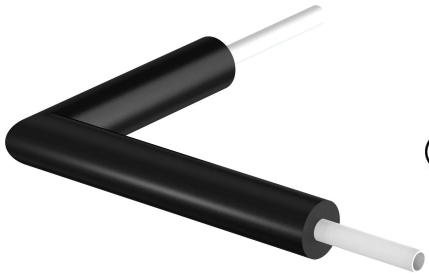

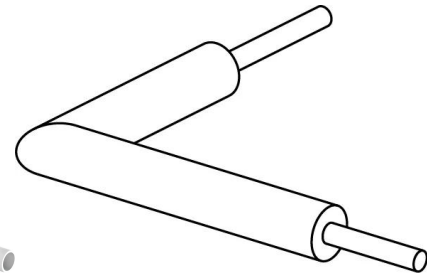

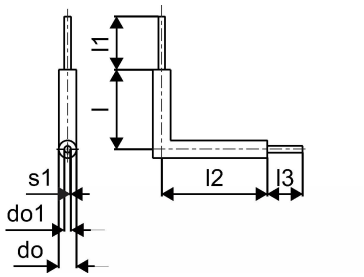

Product code

Item no EAN	6414905552207
Item no GTIN	06414905552207

Dimensions

Item Unit Height	200
Item Unit Length	1400
Item Unit Weight	18,13
Item Unit Width	1100
Item_UOM	pce

Measurements

LENGTH_L	900
Length (l1)	200
Length (l2)	1200
Length (l3)	200
Outer Diameter_do	200
Outer Diameter_do1	125
Wall thickness_s1	11,4

Packaging

Packaging GTIN PL1	06414905630981
Packaging Height PL1	200
Packaging Length PL1	1400
Packaging Quantity PL1	1
Packaging Type PL1	Piece
Packaging Volume PL1	0,308
Packaging Weight PL1	18,13
Packaging Width PL1	1100

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+