


Uponor Ecoflex VIP Aqua Pipe Single 40x5,5/140

1119047

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- VIP + PEX foam, HDPE casing

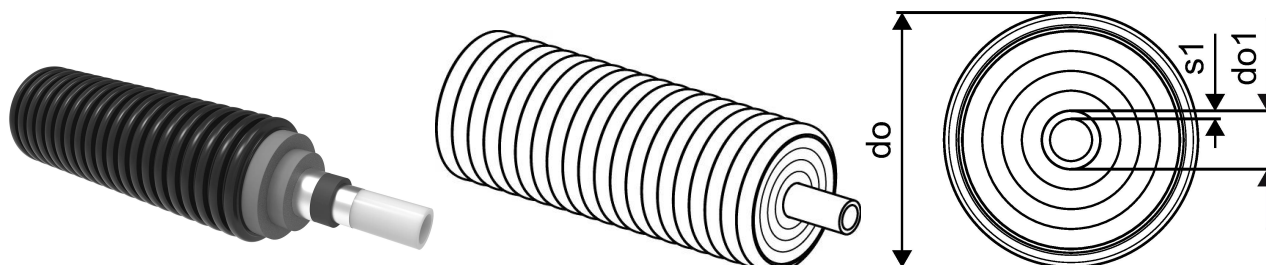

About Uponor Ecoflex VIP Aqua Pipe Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary VIP technology with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

Application


- Buried installations for the transport of warm tap water
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- UK Reg4 approval
 - WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex VIP Aqua Pipe Single 40x5,5/140

1119047

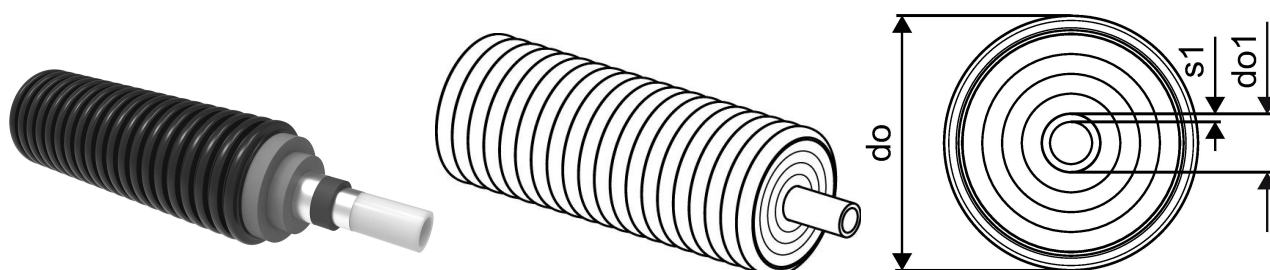

Measurements

Bending radius M	0,45
Outer Diameter_do	140
Outer Diameter_do1	40
Wall thickness_s1	5,5

Status

Item Available Till date 2027-06-30T00:00:00.000+0200

Product code

Item no EAN	6414905556298
Item no GF	35001119047
Item no GTIN	06414905556298
Item no LVI	3010293
Item no NRF	8360964
Item no RSK	2266373
Item no VVS	087364040
Item Replacement 1	1160616

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,83
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905556434
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil

Packaging Volume PL1	7,26
Packaging Weight PL1	366
Packaging Width PL1	1500

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com