


Uponor Ecoflex VIP Aqua Single 50x6,9/140

1119048

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- VIP + PEX foam, HDPE casing

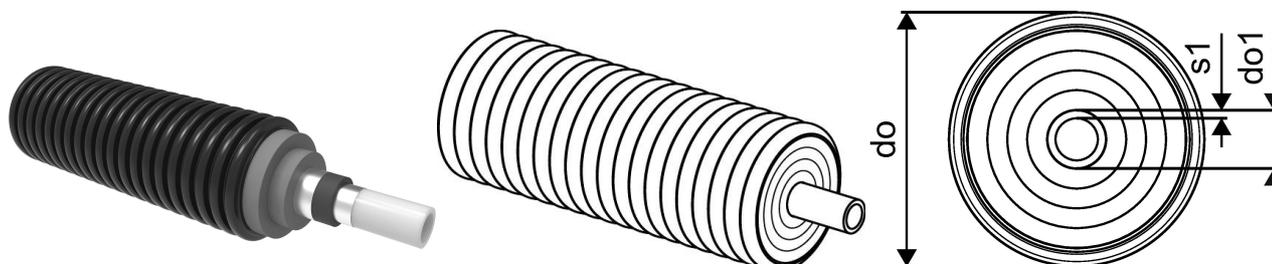

About Uponor Ecoflex VIP Aqua Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary VIP technology with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

Application


- Buried installations for the transport of warm tap water
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- UK Reg4 approval
 - WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex VIP Aqua Single 50x6,9/140

1119048

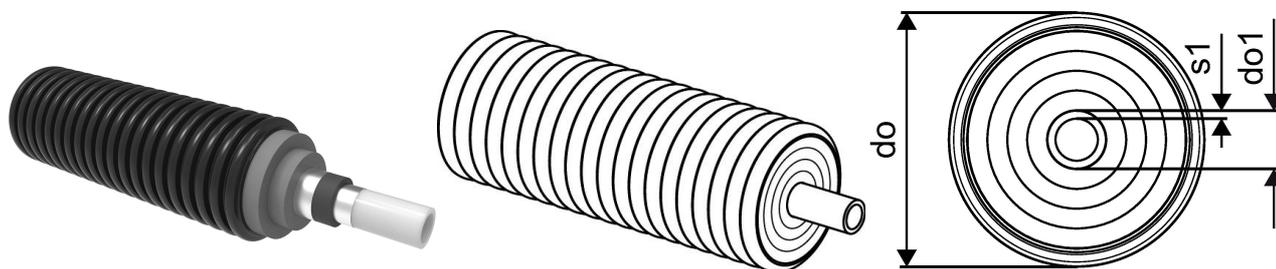

Measurements

Bending radius M	0,55
Outer Diameter_do	140
Outer Diameter_do1	50
Wall thickness_s1	6,9

Product code

Item no EAN	6414905556304
Item no GF	35001119048
Item no GTIN	06414905556304
Item no LVI	3010294
Item no NRF	8360965
Item no RSK	2266374
Item no VVS	087364050

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	2,2
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905556441
Packaging Height PL1	2200
Packaging Length PL1	2200
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	441
Packaging Width PL1	1500

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb