


Uponor Ecoflex VIP Aqua Twin 50x6,9-32x4,4/175

1119056

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- Coloured centre profile to identify flow and return lines
- VIP + PEX foam, HDPE casing

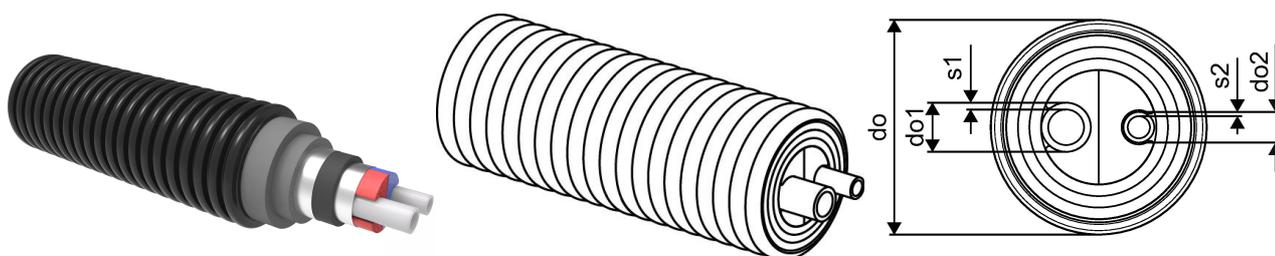

About Uponor Ecoflex VIP Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary VIP technology with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

Application

- Buried installations for the transport of warm tap water
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex VIP Aqua Twin 50x6,9-32x4,4/175

1119056

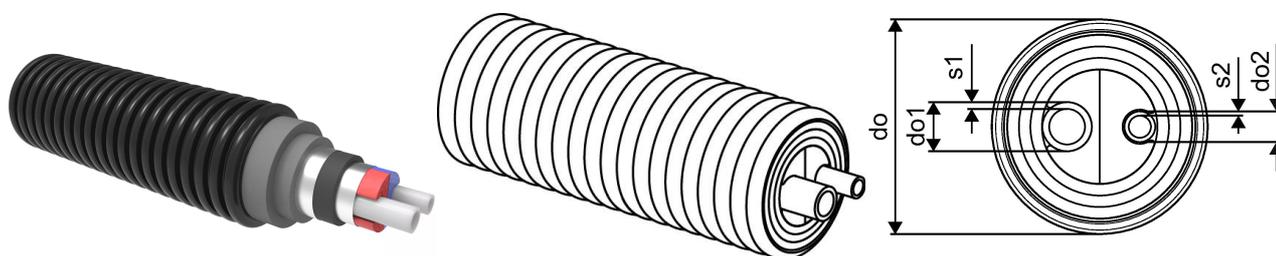

Measurements

Bending radius M	1
Outer Diameter_do	175
Outer Diameter_do1	50
Outer Diameter_do2	32
Wall thickness_s1	6,9
Wall thickness_s2	4,4

Product code

Item no EAN	6414905556380
Item no GF	35001119056
Item no GTIN	06414905556380
Item no LVI	3010302
Item no NRF	8360974
Item no RSK	2266382
Item no VVS	087364250

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	3,36
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905557950
Packaging Height PL1	2400
Packaging Length PL1	2400
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368

Packaging Weight PL1

672,1

Packaging Width PL1

1800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb