
Product data sheet





GF Uponor S-Press PLUS mounting angle 80/150

1121195

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Pre-set positioning of the connections
- Plastic pins and loss protected screws M6x12
- Pre-drilled mounting patterns

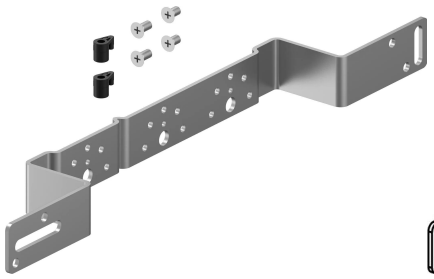

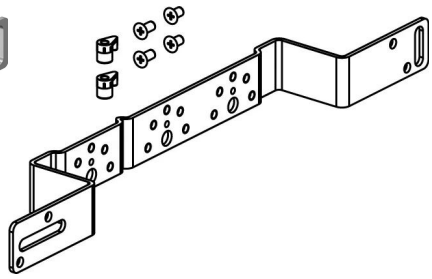



About GF Uponor S-Press PLUS mounting angle

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA


to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS mounting angle 80/150

1121195

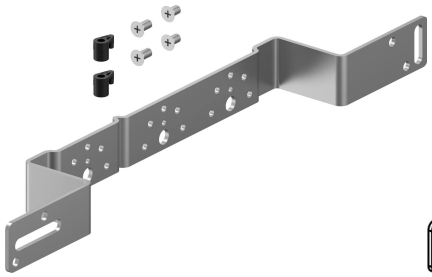

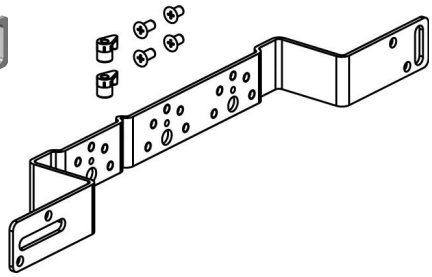



Product code

Item no EAN	6414905641543
Item no GF	35001121195
Item no GTIN	06414905641543

Dimensions

Item Unit Height	57
Item Unit Length	440
Item Unit Weight	0,435
Item Unit Width	35
Item_UOM	pce

Measurements

LENGTH_L	440
Wall thickness_s	3
Z Measurement b	266
Z Measurement h	57
Z Measurement k	80
Z Measurement k1	150
Z Measurement w	35

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414900654319
Packaging GTIN PL3	06414905663668
Packaging GTIN PL4	06414905663934
Packaging Height PL1	57
Packaging Height PL3	72

Packaging Height PL4	1090
Packaging Length PL1	440
Packaging Length PL3	477
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL3	5
Packaging Quantity PL4	680
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0008778
Packaging Volume PL3	0,00652536
Packaging Volume PL4	1,0464
Packaging Weight PL1	0,485
Packaging Weight PL3	2,525
Packaging Weight PL4	368,4
Packaging Width PL1	35
Packaging Width PL3	190
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+