


Uponor S-PRESS PLUS mounting angle 100mm

1121196

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Pre-set positioning of the connections
- Plastic pins and loss protected screws M6x12
- Pre-drilled mounting patterns

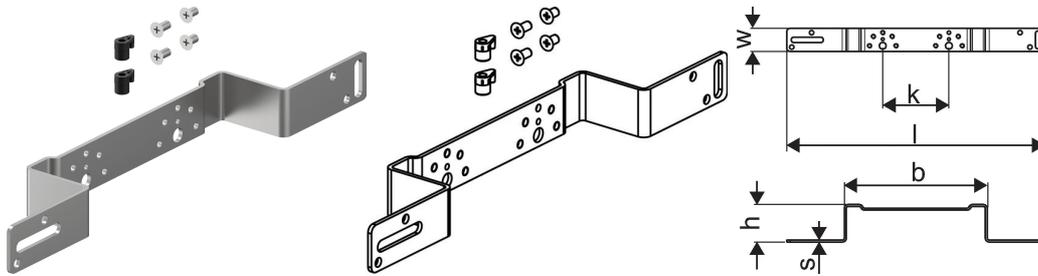

About Uponor S-PRESS PLUS mounting angle

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-PRESS PLUS mounting angle 100mm

1121196

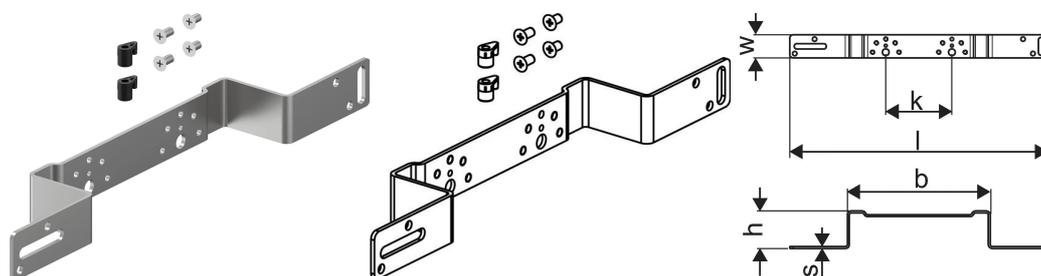

Product code

Item no EAN	6414905641550
Item no GF	35001121196
Item no GTIN	06414905641550

Dimensions

Item Unit Height	57
Item Unit Length	396
Item Unit Weight	0,395
Item Unit Width	35
Item_UOM	pce

Measurements

LENGTH_L	396
Wall thickness_s	3
Z Measurement b	222
Z Measurement h	57
Z Measurement k	100
Z Measurement k1	--
Z Measurement w	35

Packaging

Packaging GTIN PL1	06414900654326
Packaging GTIN PL3	06414905663682
Packaging GTIN PL4	06414905663927
Packaging Height PL1	57
Packaging Height PL3	72
Packaging Height PL4	999
Packaging Length PL1	396
Packaging Length PL3	427
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL3	5
Packaging Quantity PL4	680
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00079002
Packaging Volume PL3	0,00584136
Packaging Volume PL4	0,95904
Packaging Weight PL1	0,395
Packaging Weight PL3	2
Packaging Weight PL4	297
Packaging Width PL1	35
Packaging Width PL3	190
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb