


Uponor S-Press PLUS mounting plate 80/150mm

1121197

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Positioning of the connections in the given raster
- Plastic pins and loss protected screws M6x12 acc. DIN 965 included
- With holes and slots for easy attachment

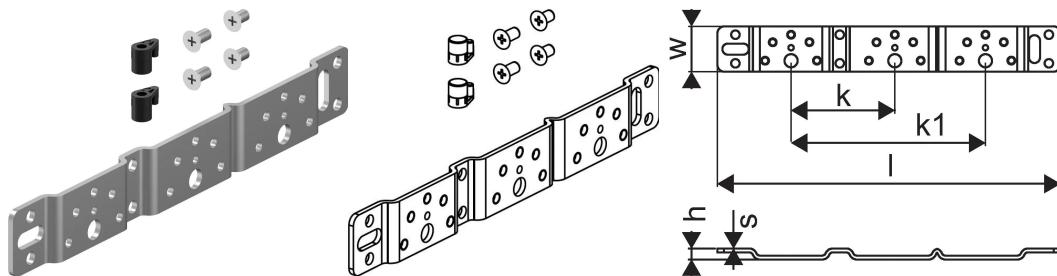

About Uponor S-Press PLUS mounting plate

Specification

- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code
- Fixed press sleeve with inspection window
- Precise jaw fixation
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland).

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar.

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multilayer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification


-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-2101339 : Manifolds and adapters

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor S-Press PLUS mounting plate 80/150mm 1121197

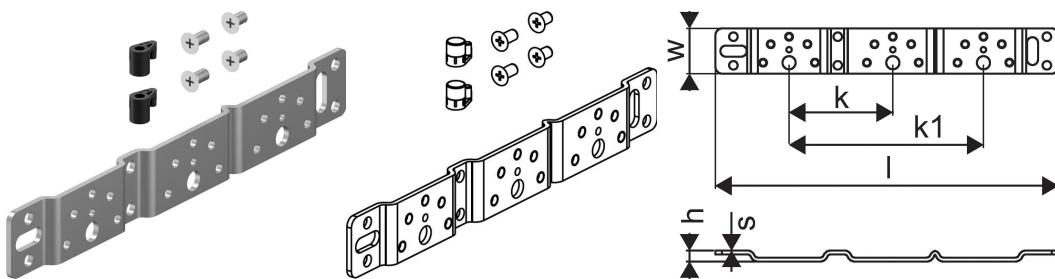

Product code

Item no EAN 6414905641567

Item no GF 35001121197

Item no GTIN 06414905641567

Dimensions

Item Unit Height 8,5

Item Unit Length 265

Item Unit Weight 0,217

Item Unit Width 35

Item_UOM pce

Measurements

LENGTH_L 265

Wall thickness_s 3

Z Measurement h 8,5

Z Measurement k 80

Z Measurement k1 150

Z Measurement w 35

Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1 06414905663897

Packaging GTIN PL3 06414905663705

Packaging GTIN PL4 06414905663644

Packaging Height PL3 65

Packaging Height PL4 600

Packaging Length PL3 291

Packaging Length PL4 1200

Packaging Quantity PL3 5

Packaging Quantity PL4	1120
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,00170235
Packaging Volume PL4	0,576
Packaging Weight PL3	1,1
Packaging Weight PL4	272
Packaging Width PL3	90
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb