
Product data sheet



GF Uponor S-Press PLUS mounting plate 80/150

1121197

- Made of galvanized steel.
- For the installation of Uponor Smart Aqua tap elbows
- Pre-set positioning of the connections
- Plastic pins and loss protected screws M6x12
- Pre-drilled mounting patterns

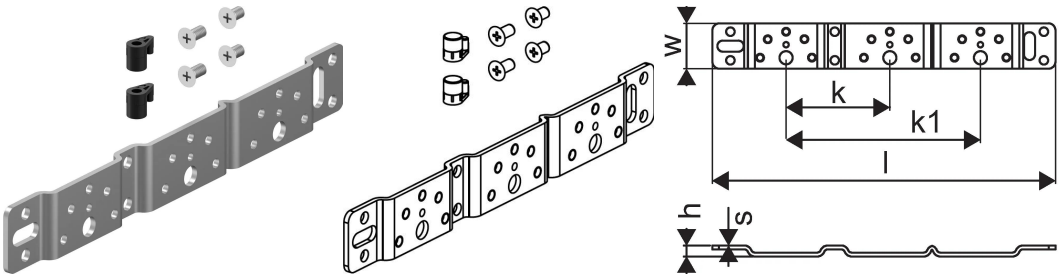

About GF Uponor S-Press PLUS mounting plate

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS mounting plate 80/150

1121197

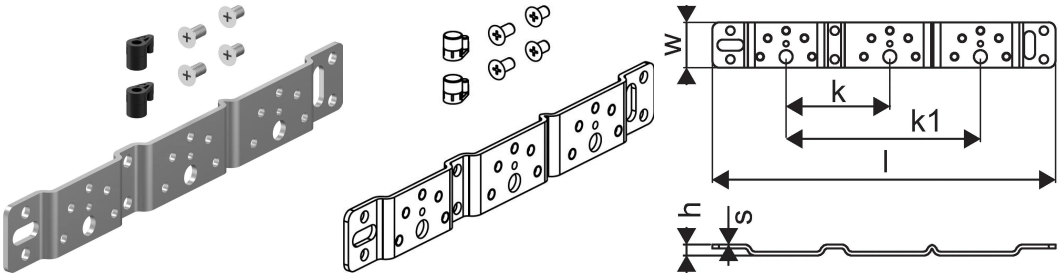

Product code

Item no EAN	6414905641567
Item no GF	35001121197
Item no GTIN	06414905641567

Dimensions

Item Unit Height	8.5
Item Unit Length	265
Item Unit Weight	0,217
Item Unit Width	35
Item_UOM	pce

Measurements

LENGTH_L	265
Wall thickness_s	3
Z Measurement h	8,5
Z Measurement k	80
Z Measurement k1	150
Z Measurement w	35

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905663897
Packaging GTIN PL3	06414905663705
Packaging GTIN PL4	06414905663644
Packaging Height PL3	65
Packaging Height PL4	600
Packaging Length PL3	291

Packaging Length PL4	1200
Packaging Quantity PL3	5
Packaging Quantity PL4	1120
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL3	0,00170235
Packaging Volume PL4	0,576
Packaging Weight PL3	1,1
Packaging Weight PL4	272
Packaging Width PL3	90
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+