


Uponor Ecoflex jointing equal PN6 140x12,7-140x12,7

1121635

- Connection of PE-Xa or PE pipe
- 6bar, SDR 11
- DZR - dezincification resistant brass

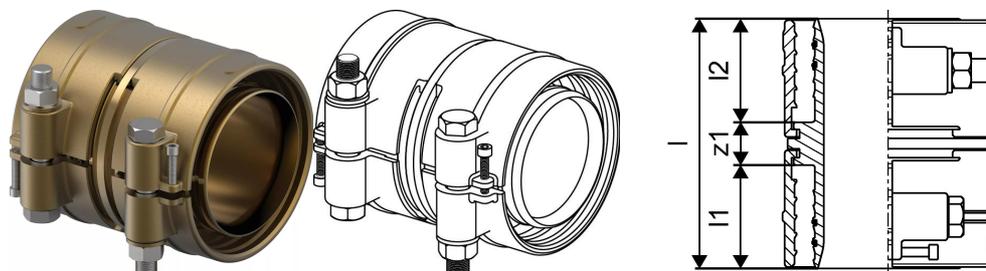

About Uponor Ecoflex jointing equal PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification to BS EN ISO 6509 with stainless steel screw.
- Sizes 25-110mm, O-ring sealing between Wipex coupling and base fitting
- Sizes 125-160mm, threads must be sealed using a suitable sealing medium
- Bolt set for couplers in stainless steel with brass washer
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application

- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Thermo HP
- Connection of PE and PE-Xa carrier pipes to couplers
- Parallel G male thread
- Max. operating temperature 95°C

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex jointing equal PN6 140x12,7-140x12,7

1121635

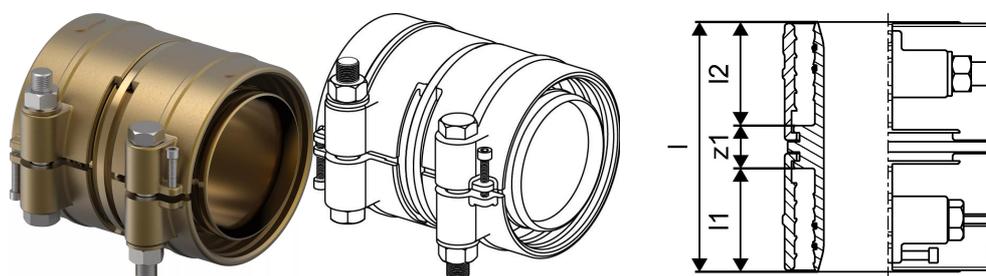

Status

Item Available From date 2025-01-01

Until stocks last Until stocks last

Product code

Item no EAN 6414905661497

Item no GF 35001121635

Item no GTIN 06414905661497

Item no LVI 1938518

Item no NRF 8361288

Item no RSK 2282762

Item no VVS 087882340

Dimensions

Item Unit Height 215

Item Unit Length 169

Item Unit Weight 10,1

Item Unit Width 215

Item_UOM pce

Measurements

LENGTH_L 169

Length (l1) 70

Length (l2) 70

Wall thickness_s 12,7

z1 29

Packaging

Packaging GTIN PL1 06414905672288

Packaging Height PL1 200

Packaging Length PL1 300

Packaging Quantity PL1 1

Packaging Type PL1	Base_Box
Packaging Volume PL1	0,0096
Packaging Weight PL1	10,3
Packaging Width PL1	160

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb