


## Uponor Ecoflex jointing equal PN6 160x14,6-160x14,6

**1121636**

- Connection of PE-Xa or PE pipe
- 6 bar, SDR 11
- DR = dezincification resistance brass

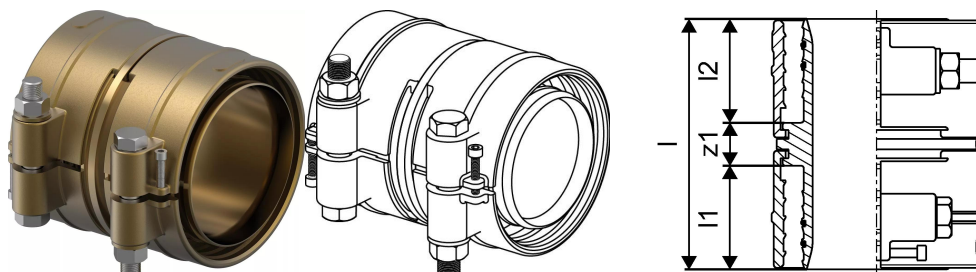

### About Uponor Ecoflex jointing equal PN6

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

#### Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex jointing equal PN6 160x14,6-160x14,6

1121636

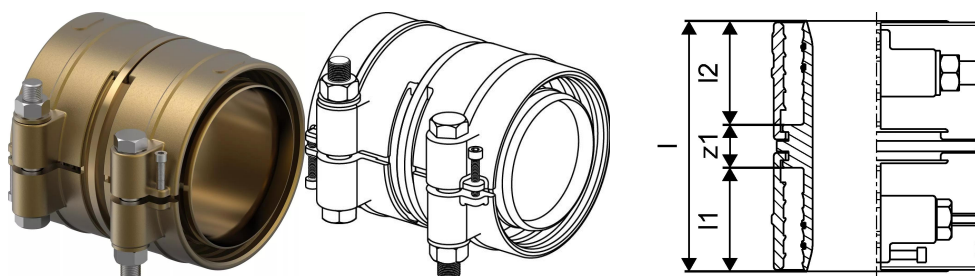

### Technical data

Item no EAN	6414905661510
Item no GTIN	06414905661510
Item no VVS	087882360
RSK no.	2282763
Item no NRF	8361289
Item no LVI	1938519
Item (unit of measurement)	pce
Length (l)	169 mm
Length (l1)	70 mm
Length (l2)	70 mm
Packaging Quantity 1	1
Packaging GTIN PL1	06414905672264
Item Unit Height	228 mm
Item Unit Weight	11,819 kg
Item Unit Width	228 mm

### Technical documents

Download documents here

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)