


Uponor Ecoflex flange F125/8-200/ Rp5

1121640

- Parallel thread Rp" - requires suitable sealing medium
- 6 bar, SDR 11 / 10 bar, SDR 7,4
- Stainless steel

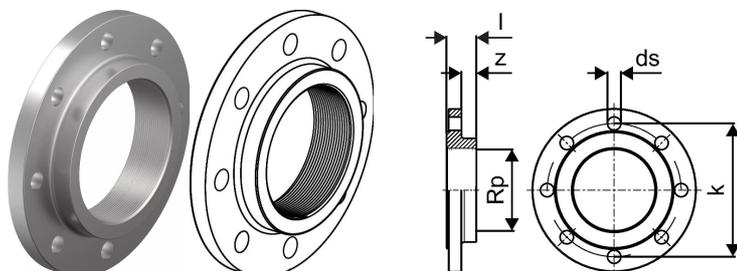

About Uponor Ecoflex flange

Specification

- Wipex fittings in corrosion-resistant brass, dezincification to BS EN ISO 6509 with stainless steel screw.
- Sizes 25-110mm, O-ring sealing between Wipex coupling and base fitting
- Sizes 125-160mm, threads must be sealed using a suitable sealing medium
- Bolt set for couplers in stainless steel with brass washer
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Thermo HP
- Connection of PE and PE-Xa carrier pipes to couplers
- Parallel G male thread
- Max. operating temperature 95°C

Certification

- UK Reg4 approval
 - WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex flange F125/8-200/ Rp5

1121640

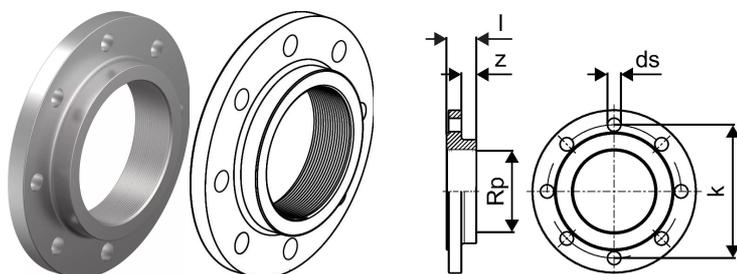

Measurements

Female thread Rp	5
LENGTH_L	44
Z Measurement k	210
Z	22

Status

Item Available From date	2025-01-01
Until stocks last	Until stocks last

Product code

Item no EAN	6414905661558
Item no GF	35001121640
Item no GTIN	06414905661558
Item no LVI	1938523
Item no NRF	8361294
Item no RSK	2282767
Item no VVS	087844525

Dimensions

Item Unit Height	250
Item Unit Length	44
Item Unit Weight	6,3
Item Unit Width	250
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905672332
Packaging Height PL1	310
Packaging Length PL1	270
Packaging Quantity PL1	1
Packaging Type PL1	Base_Box

Packaging Volume PL1	0,025947
Packaging Weight PL1	6,5
Packaging Width PL1	310

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb