


Uponor Ecoflex weldable adapter ST PN6 EU 140x12,7-139

1121641

- Connection of PE-Xa pipes
- 6 bar, SDR 11
- Steel adapter for welding

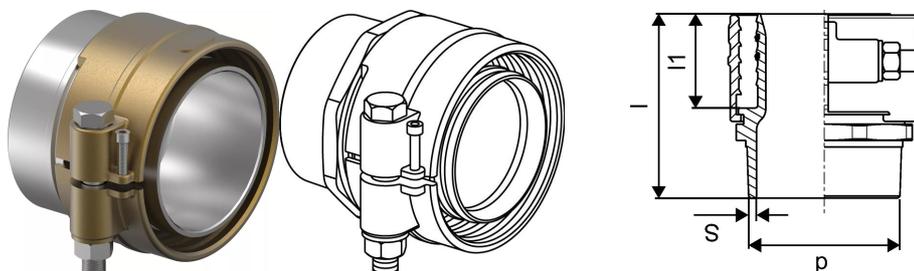

About Uponor Ecoflex weldable adapter ST PN6

Specification

- Wipex fittings in corrosion-resistant brass, dezincification to BS EN ISO 6509 with stainless steel screw.
- Sizes 25-110mm, O-ring sealing between Wipex coupling and base fitting
- Sizes 125-160mm, threads must be sealed using a suitable sealing medium
- Bolt set for couplers in stainless steel with brass washer
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.

Application


- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Thermo HP
- Connection of PE and PE-Xa carrier pipes to couplers
- Parallel G male thread
- Max. operating temperature 95°C

Certification

- UK Reg4 approval
- WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex weldable adapter ST PN6 EU 140x12,7-139

1121641

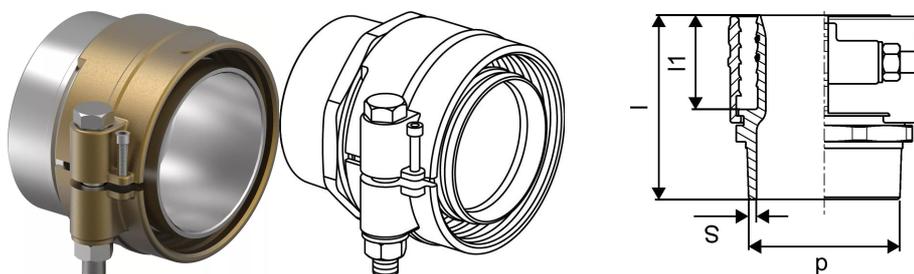

Status

Item Available From date 2025-01-01

Until stocks last Until stocks last

Product code

Item no EAN 6414905661565

Item no GF 35001121641

Item no GTIN 06414905661565

Item no VVS 087880140

Dimensions

Item Unit Height 214

Item Unit Length 120

Item Unit Weight 5,7

Item Unit Width 214

Item_UOM pce

Measurements

LENGTH_L 120

Length (l1) 70

Wall thickness_s 6,15

Z Measurement d 139,7

Packaging

Packaging GTIN PL1 06414905672295

Packaging Height PL1 200

Packaging Length PL1 300

Packaging Quantity PL1 1

Packaging Type PL1 Base_Box

Packaging Volume PL1 0,0096

Packaging Weight PL1 5,9

Packaging Width PL1 160

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb