


Uponor Ecoflex VIP Thermo Single 140x12,7/200

1121643

- Heating and Cooling
- Single PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- VIP + PEX foam, HDPE casing

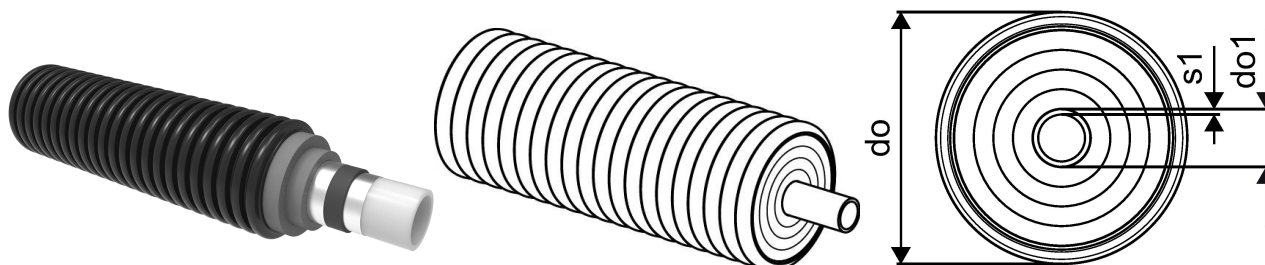

About Uponor Ecoflex VIP Thermo Single

Specification

- Highest thermally efficient VIP (Vacuum Insulated Panel)
 λ 0.004 w*m/K
- Highest thermal resistance for complete insulation assembly
- Flexible, pre-insulated, self-compensating plastic pipe system manufactured to BS EN 15632 and BS EN 17414.
- Carrier pipe: cross-linked polyethylene (PE-Xa) pipe based on BS EN ISO 15875, natural Coloured, PN 6 (SDR 11)
- Oxygen tightness based on BS EN 15632 to ISO 17455 and DIN 4726
- Insulating material: Revolutionary VIP technology with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)

Application

- Ideal for low-carbon heating and cooling technologies
- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632
- Malfunction temperature 95°C
- Static verification for heavy traffic load of up to 60 tons

Certification

-

Uponor Ecoflex VIP Thermo Single 140x12,7/200

1121643



Measurements

Bending radius M	1,7
Outer Diameter_do	200
Outer Diameter_do1	140
Wall thickness_s1	12,7

Status

Item Available From date 2025-02-01

Product code

Item no EAN	6414905661435
Item no GTIN	06414905661435
Item no LVI	3010134
Item no NRF	8361295
Item no RSK	2266383
Item no VVS	087808340

Dimensions

Item Unit Height	200
Item Unit Length	1000
Item Unit Weight	7,59
Item Unit Width	200
Item_UOM	m

Packaging

Packaging GTIN PL1	06414900597968
Packaging Height PL1	2400
Packaging Length PL1	2400
Packaging Quantity PL1	100
Packaging Type PL1	Coil
Packaging Volume PL1	9,216
Packaging Weight PL1	759

Packaging Width PL1

1600

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb