


Uponor Ecoflex VIP Aqua Twin 63x8,6-40x5,5/200

1132671

- Warm tap water
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- VIP + PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

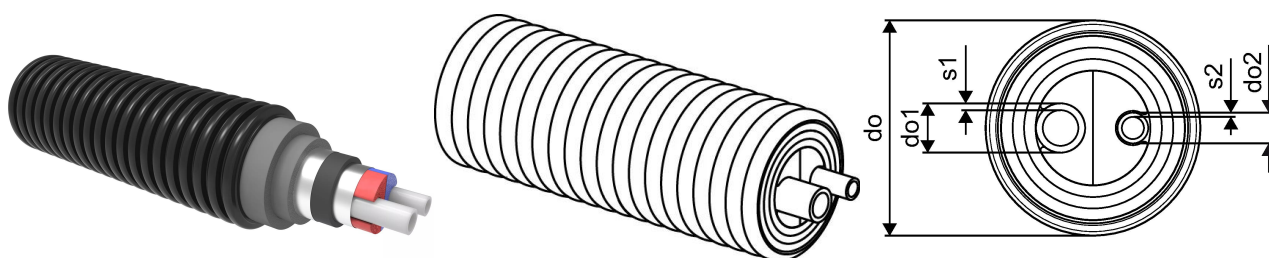

About Uponor Ecoflex VIP Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: Revolutionary insulation material with extremely low lambda value in combination with permanently elastic closed-cell PE-X foam
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex VIP Aqua Twin 63x8,6-40x5,5/200

1132671

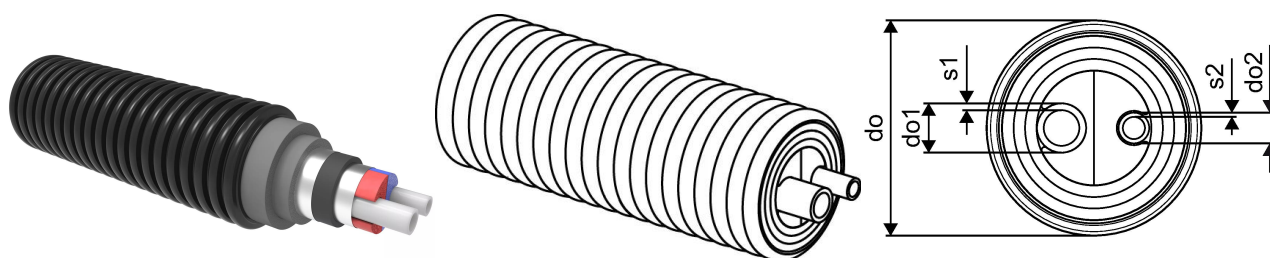

Technical data

Item no EAN	6414900038942
Item no GTIN	06414900038942
Item no VVS	087364263
RSK no.	2266385
Item no NRF	8361287
Item no LVI	3010137
Item (unit of measurement)	m
Bending radius 2	1,1 m
Packaging Quantity 1	100
Packaging GTIN PL1	06414900038959
Item Unit Height	200 mm
Item Unit Weight	4,87 kg
Item Unit Width	200 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb