


Uponor Uni Pipe PLUS clip single 16

1135502

- Easy to open clip
- Clips can be assembled in series
- Fixing using screws - max. diameter 5mm

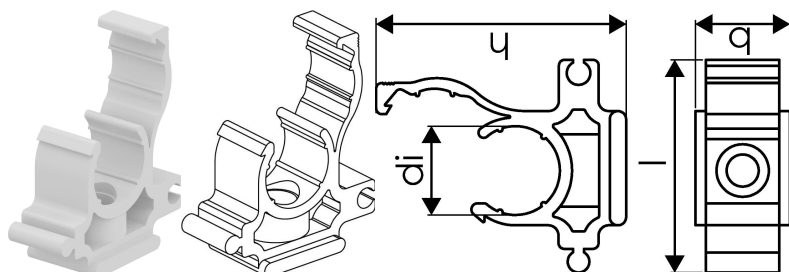

About Uponor Uni Pipe PLUS clip single

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Uni Pipe PLUS clip single 16

1135502

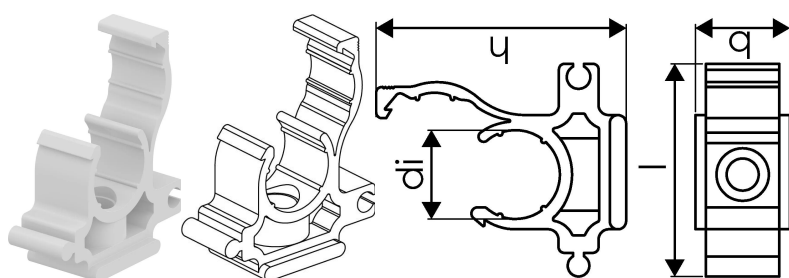

Measurements

Inner_diameter_di	16
LENGTH_L	40
Z Measurement b	18
Z Measurement h	47

Product code

Item no EAN	6414900368155
Item no GF	35001135502
Item no GTIN	06414900368155

Dimensions

Item Unit Height	18
Item Unit Length	47
Item Unit Weight	0,006
Item Unit Width	35
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900423342
Packaging GTIN PL3	06414900423502
Packaging GTIN PL4	06414900325714
Packaging Height PL1	105
Packaging Height PL3	360
Packaging Height PL4	1819
Packaging Length PL1	150
Packaging Length PL3	485
Packaging Length PL4	1200
Packaging Quantity PL1	50
Packaging Quantity PL3	1350
Packaging Quantity PL4	27000

Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0023625
Packaging Volume PL3	0,058491
Packaging Volume PL4	1,74624
Packaging Weight PL1	0,3
Packaging Weight PL3	8,1
Packaging Weight PL4	249
Packaging Width PL1	150
Packaging Width PL3	335
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb