
# Product data sheet



# GF Uponor Uni Pipe PLUS clip single 50

## 1135507

- Easy to open clip
- Clips can be assembled in series
- Fixing using screws - max. diameter 5mm

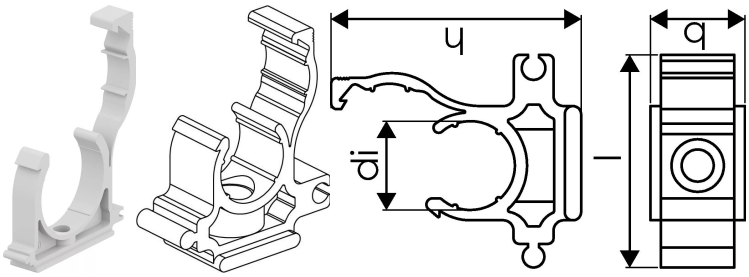

# About GF Uponor Uni Pipe PLUS clip single

## Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

## Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

# GF Uponor Uni Pipe PLUS clip single 50

## 1135507

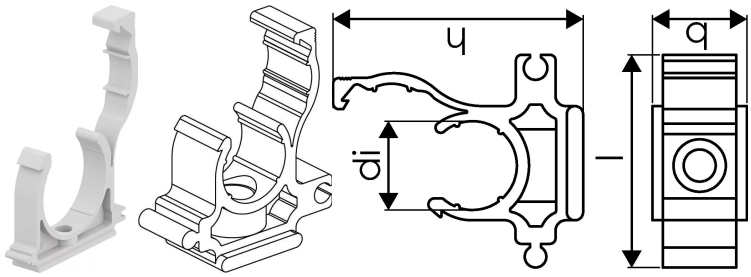


### Measurements

| | |
|---|---|
| Inner_diameter_di | 50 |
| LENGTH_L | 80 |
| Z Measurement b | 17 |
| Z Measurement h | 116 |

### Product code

| | |
|---|---|
| Item no EAN | 6414900368209 |
| Item no GTIN | 06414900368209 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 18 |
| Item Unit Length | 116 |
| Item Unit Weight | 0,026 |
| Item Unit Width | 80 |
| Item_UOM | pce |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414900423397 |
| Packaging GTIN PL3 | 06414900423540 |
| Packaging GTIN PL4 | 06414900325745 |
| Packaging Height PL1 | 155 |
| Packaging Height PL3 | 360 |
| Packaging Height PL4 | 1819 |
| Packaging Length PL1 | 225 |
| Packaging Length PL3 | 485 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 25 |
| Packaging Quantity PL3 | 200 |

| | |
|---|---|
| Packaging Quantity PL4 | 4000 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,00592875 |
| Packaging Volume PL3 | 0,058491 |
| Packaging Volume PL4 | 1,74624 |
| Packaging Weight PL1 | 0,66 |
| Packaging Weight PL3 | 5,6 |
| Packaging Weight PL4 | 264 |
| Packaging Width PL1 | 170 |
| Packaging Width PL3 | 335 |
| Packaging Width PL4 | 800 |

## Technical documents

Download documents here

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**




**Uponor UK**

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb


+GF+