
Product data sheet




GF Uponor Uni Pipe PLUS clip double 16

1135508

- Easy to open clip
- Clips can be assembled in series
- Fixing using screws - max. diameter 5mm

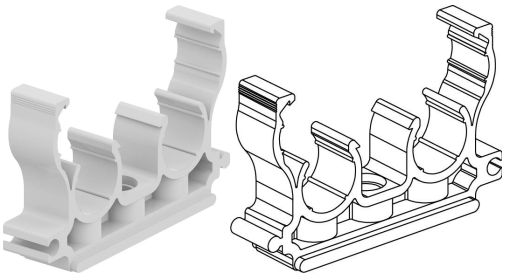



About GF Uponor Uni Pipe PLUS clip double

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)
- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the
Water Supply (Water Fittings) Regulations 1999

GF Uponor Uni Pipe PLUS clip double 16

1135508

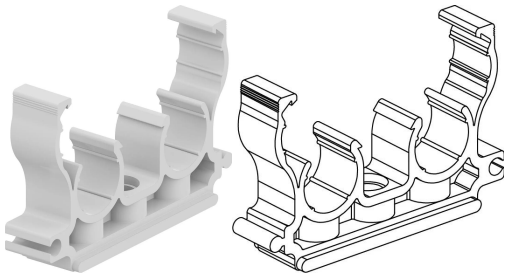



Measurements

Distance center center	34
Inner_diameter_di	16
LENGTH_L	72
Z Measurement b	18
Z Measurement h	47

Product code

Item no EAN	6414900368216
Item no GTIN	06414900368216

Dimensions

Item Unit Height	18
Item Unit Length	73
Item Unit Weight	0,013
Item Unit Width	47
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900423403
Packaging GTIN PL3	06414900423557
Packaging GTIN PL4	06414900370653
Packaging Height PL1	105
Packaging Height PL3	410
Packaging Height PL4	1960
Packaging Length PL1	150
Packaging Length PL3	485
Packaging Length PL4	1200
Packaging Quantity PL1	40

Packaging Quantity PL3	720
Packaging Quantity PL4	17280
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0023625
Packaging Volume PL3	0,06064925
Packaging Volume PL4	1,8816
Packaging Weight PL1	0,62
Packaging Weight PL3	11,65
Packaging Weight PL4	304,6
Packaging Width PL1	150
Packaging Width PL3	305
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+