


Uponor Uni Pipe PLUS clip double 25

1135510

- Easy to open clip
- Clips can be assembled in series
- Fixing using screws - max. diameter 5mm

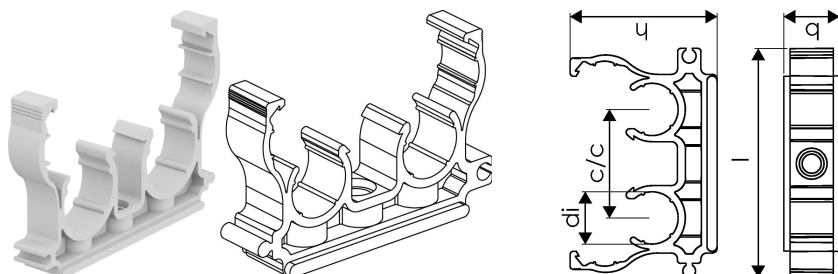

About Uponor Uni Pipe PLUS clip double

Specification

Uponor Uni Pipe PLUS Seamless Aluminium Composite (SAC).

PE-RT/AL/PE-RT - 5 layer composite pipe consisting of an Aluminium pipe (100% oxygen-proof diffusion barrier, exceeding the requirements of DIN 4726), bonded to an inner layer of PE-RT (Polyethylene Raised Temperature), and outer layer of white PE-RT (Polyethylene Raised Temperature)

- Manufactured to BS EN ISO 21003-1 2008.
- Pipes are marked at 1m intervals with full production data in accordance with the requirements of the standard.
- Sizes 14-32 mm supplied as flexible coils
- Sizes 16-32 mm as extra rigid straight lengths.

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Uni Pipe PLUS clip double 25

1135510

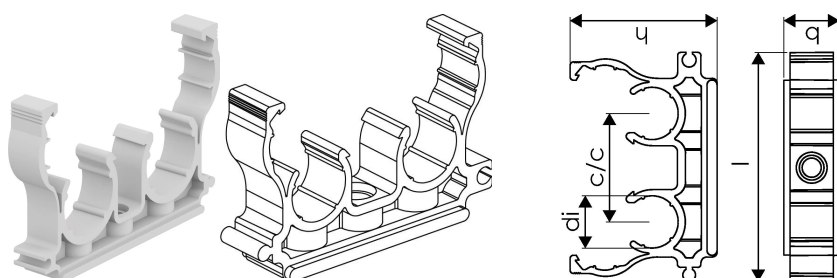

Measurements

| | |
|------------------------|----|
| Distance center center | 47 |
| Inner_diameter_di | 25 |
| LENGTH_L | 96 |
| Z Measurement b | 18 |
| Z Measurement h | 68 |

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414900368230 |
| Item no GTIN | 06414900368230 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 18 |
| Item Unit Length | 94 |
| Item Unit Weight | 0,022 |
| Item Unit Width | 79 |
| Item_UOM | pce |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414900423427 |
| Packaging GTIN PL3 | 06414900423571 |
| Packaging GTIN PL4 | 06414900423724 |
| Packaging Height PL1 | 155 |
| Packaging Height PL3 | 360 |
| Packaging Height PL4 | 1980 |
| Packaging Length PL1 | 225 |
| Packaging Length PL3 | 485 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 40 |
| Packaging Quantity PL3 | 320 |
| Packaging Quantity PL4 | 8000 |

| | |
|----------------------|------------|
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,00592875 |
| Packaging Volume PL3 | 0,058491 |
| Packaging Volume PL4 | 1,9008 |
| Packaging Weight PL1 | 0,98 |
| Packaging Weight PL3 | 8,39 |
| Packaging Weight PL4 | 234,75 |
| Packaging Width PL1 | 170 |
| Packaging Width PL3 | 335 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb