


Uponor Aqua Ambient point drain inlet down standard 100mmx100mm FI 50

1136469

- Connection to waste pipes DN 50 or DN 110
- Flow rate: DN 50 0,8 l/s, DN 110 1,4 l/s
- Material grate: stainless-steel
- Material body: polypropylene

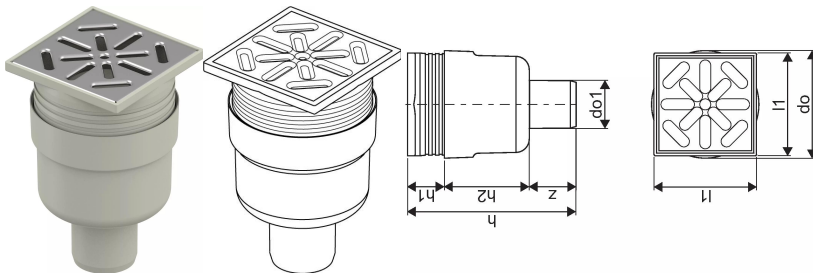

About Uponor Aqua Ambient point drain inlet down standard

Specification

- Available in different sizes: 600, 700, 800, 900, 1000mm
- Wide sealing collar (30mm) ensuring tight jointing to the floor construction
- Adjustable height and fixable legs for integration in every kind of floor construction
- Wide range compatible with all common waste outlet pipework.

Application


- Bathroom greywater applications

Certification

- Technical assessment acc BS EN 1253

Uponor Aqua Ambient point drain inlet down standard 100mmx100mm FI 50

1136469

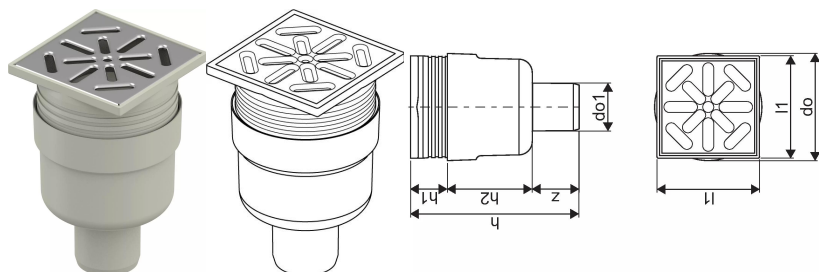

Product code

Item no EAN	6414900483681
Item no GF	35001136469
Item no GTIN	06414900483681

Dimensions

Item Unit Height	137.5
Item Unit Length	107.4
Item Unit Weight	0,35
Item Unit Width	107.4
Item_UOM	pce

Measurements

Length (l1)	107
Outer Diameter_do	112
Outer Diameter_do1	50
Z Measurement h	175,8
Z Measurement h1	38,5
Z Measurement h2	88,5
Z	49

Packaging

Packaging GTIN PL1	06414900369404
Packaging GTIN PL4	06414900325905
Packaging Height PL1	155
Packaging Height PL4	1308
Packaging Length PL1	165
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	336

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00332475
Packaging Volume PL4	1,25568
Packaging Weight PL1	0,4
Packaging Weight PL4	430
Packaging Width PL1	130
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com