


Uponor Aqua Ambient point drain inlet down standard 100mmx100mm FI 50

1136469

- connection to sewage pipes DN 50 or DN 110
- flow rate: DN 50 0,8 l/s, DN 110 1,4 l/s
- material grate: stainless steel
- material body: polypropylene

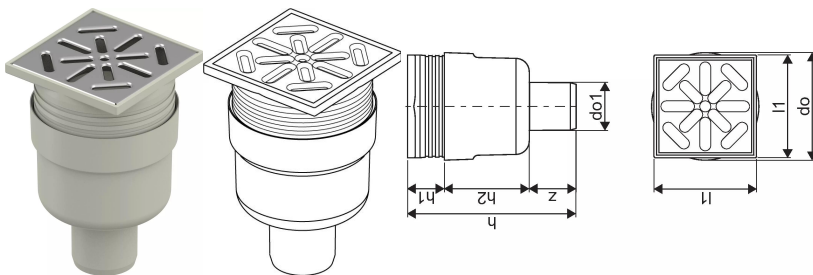

About Uponor Aqua Ambient point drain inlet down standard

Specification

- Modern construction and stylish design in different sizes: 600, 700, 800, 900, 1000mm
- Wide sealing collar (30mm) ensuring tight jointing to the floor construction
- Adjustable height and fixable legs for integration in every kind of floor construction
- Easy installation due to product completeness and compatibility to wastewater installation system (dimension of waste pipes)
- 360° tunable siphon

Application


- Housing sewage systems

Certification

- Technical assessment acc EN 1253

Uponor Aqua Ambient point drain inlet down standard 100mmx100mm FI 50

1136469

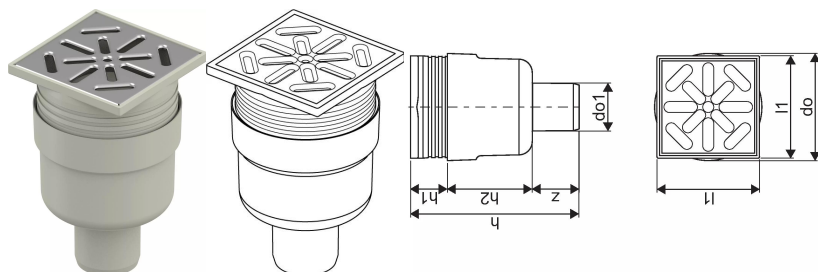

Technical data

Item no EAN	6414900483681
Item no GTIN	06414900483681
Item (unit of measurement)	pce
Length (l1)	107 mm
z	49 mm
Z-measurement h	176 mm
Z-measurement h1	39 mm
Z-measurement h2	89 mm
Packaging Quantity 1	1
Packaging Quantity 4	336
Packaging GTIN PL1	06414900369404
Packaging GTIN PL4	06414900325905
Item Unit Height	138 mm
Item Unit Weight	0,35 kg
Item Unit Width	107 mm

Technical documents

[Download documents here](#)

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb