


Uponor Aqua Ambient point drain inlet down standard 150mmx150mm FI 110

1136470

- Connection to waste pipes DN 50 or DN 110
- Flow rate: DN 50 0,8 l/s, DN 110 1,4 l/s
- Material grate: stainless-steel
- Material body: polypropylene

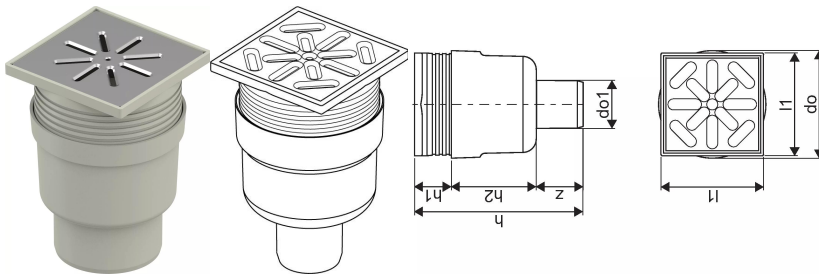

About Uponor Aqua Ambient point drain inlet down standard

Specification

- Available in different sizes: 600, 700, 800, 900, 1000mm
- Wide sealing collar (30mm) ensuring tight jointing to the floor construction
- Adjustable height and fixable legs for integration in every kind of floor construction
- Wide range compatible with all common waste outlet pipework.

Application


- Bathroom greywater applications

Certification

- Technical assessment acc BS EN 1253

Uponor Aqua Ambient point drain inlet down standard 150mmx150mm FI 110

1136470

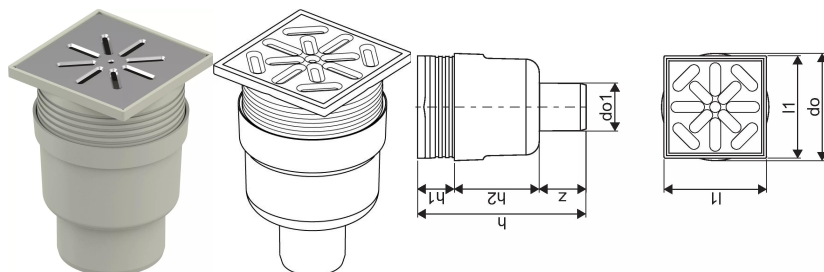

Product code

Item no EAN	6414900483698
Item no GF	35001136470
Item no GTIN	06414900483698

Dimensions

Item Unit Height	220
Item Unit Length	149.5
Item Unit Weight	0,48
Item Unit Width	149.5
Item_UOM	pce

Measurements

Length (l1)	149,5
Outer Diameter_do	158
Outer Diameter_do1	110
Z Measurement h	163
Z Measurement h1	57,7
Z Measurement h2	10,5
Z	58

Packaging

Packaging GTIN PL1	06414900369411
Packaging GTIN PL4	06414900325912
Packaging Height PL1	170
Packaging Height PL4	1295
Packaging Length PL1	195
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	196

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0056355
Packaging Volume PL4	1,2432
Packaging Weight PL1	0,77
Packaging Weight PL4	253
Packaging Width PL1	170
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E
customerservice.uk.bfs@georgfi
scher.com