


## Uponor Ecoflex Thermo Pipe Twin HP 2x63x5,8+2x32x3,5/200

**1137495**

- Point-to-point heat-pump connection pipe, heating and cooling
- Two PE-Xa carrier pipes with oxygen barrier, SDR 11
- Oxygen tightness to ISO 17455 and DIN 4726
- Two cable conduits for power and data cables
- Max. load 6 bar / 80°C
- Coloured centre profile to identify flow and return lines
- PEX foam, HDPE casing

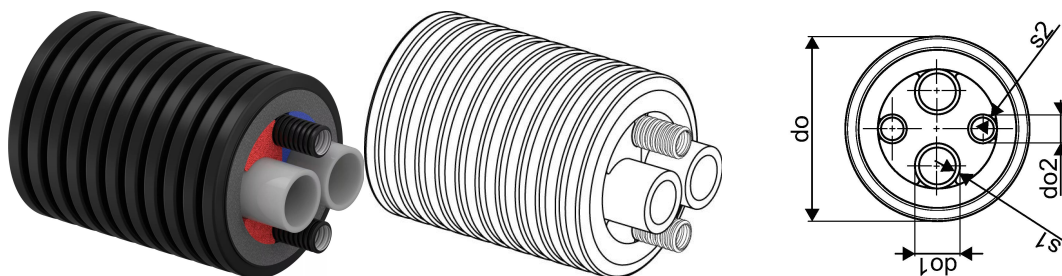

### About Uponor Ecoflex Thermo Pipe Twin HP

#### Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

#### Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

#### Certification

-

## Uponor Ecoflex Thermo Pipe Twin HP 2x63x5,8+2x32x3,5/200

1137495

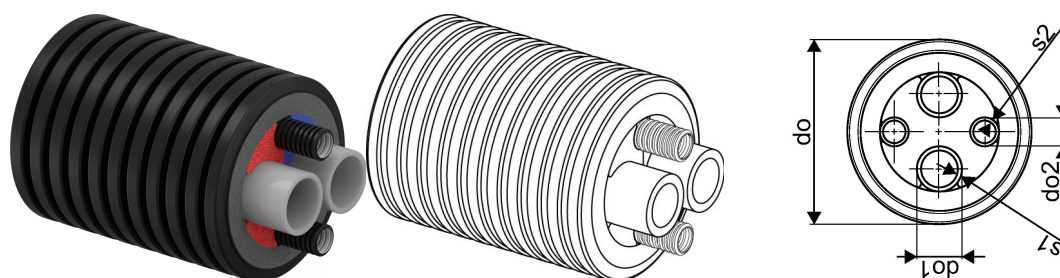

### Measurements

Bending radius M	1
Outer Diameter_do	200
Outer Diameter_do1	63
Outer Diameter_do2	32
Wall thickness_s1	5,8
Wall thickness_s2	3,5

### Status

Item Available From date	2026-03-01
--------------------------	------------

### Product code

Item no EAN	6414900368445
Item no GTIN	06414900368445

### Dimensions

Item Unit Height	200
Item Unit Length	1000
Item Unit Weight	4,306
Item Unit Width	200
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414900438896
Packaging Height PL1	2400
Packaging Length PL1	2400
Packaging Quantity PL1	100
Packaging Type PL1	Coil
Packaging Volume PL1	8,064
Packaging Weight PL1	431
Packaging Width PL1	1400

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)