


Uponor Base controller H pump X-60 6x 230V

1138349

- Controller with autobalance function for 230V standard wiring
- supports up to 6 thermostats (230V)
- supports up to 12 actuators (230V), with 2 actuators at a time that follow a common thermostat (6x 2 actuators)
- noiseless actuator switching
- autobalancing in heating optimises energy use and comfort
- switch to enable/disable the autobalance function
- pump relay
- time limit by-pass with autobalance
- input: day/night switch
- 4 wires for thermostat connection
- works with 3 wires thermostat (2 wires for power supply 230 V, 1 output 230 V demand) and 4 wires thermostat for full functionality (day/night signal)
- connection terminals for thermostat/actuator 0,13 ... 1,5 mm²
- overload protection
- protection class: IP20

- Consisting of:
 - Uponor Base controller X-60
 - without power cable
 - mounting material, DIN rail included

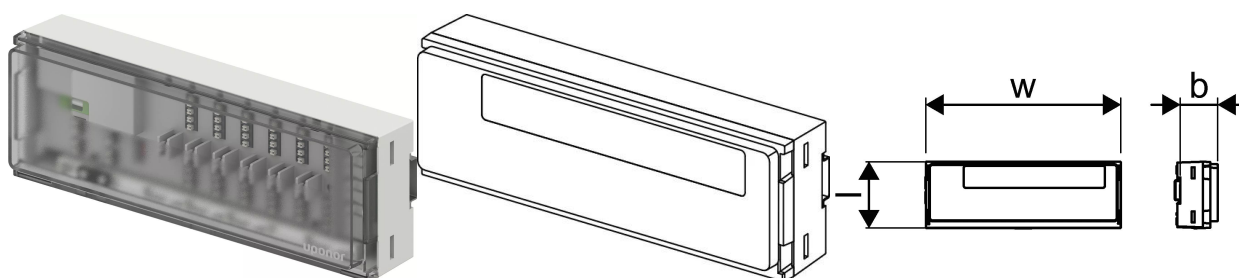

About Uponor Base controller H pump X-60

Specification

- 230V standard wiring
- common wiring method and controls logic
- easy integration to standard on/off time control
- optional: pump logic

Application


- wired room temperature control for radiant heating

Certification

- CE, UKCA

Uponor Base controller H pump X-60 6x 230V

1138349

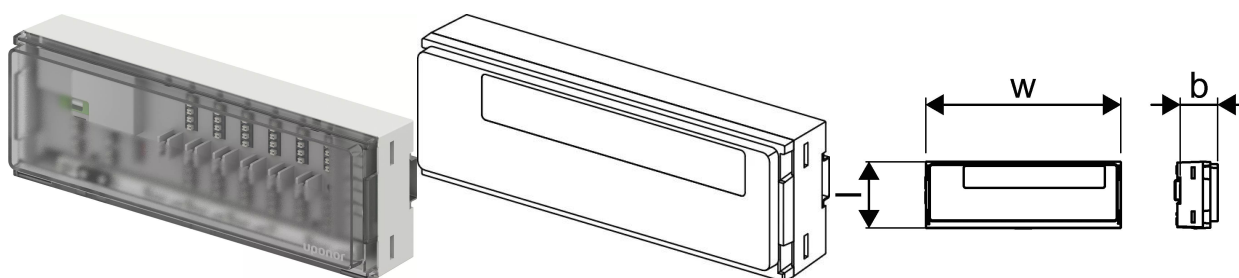

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb