


Uponor Siccus Mini edge support 1000x45x15mm

1139794

- Synthetic fibre strip 1.000x45x15mm
- Mandatory edge support on wall sides and in doorways in Siccus Mini installations with flooring of ceramic tiles and natural stone

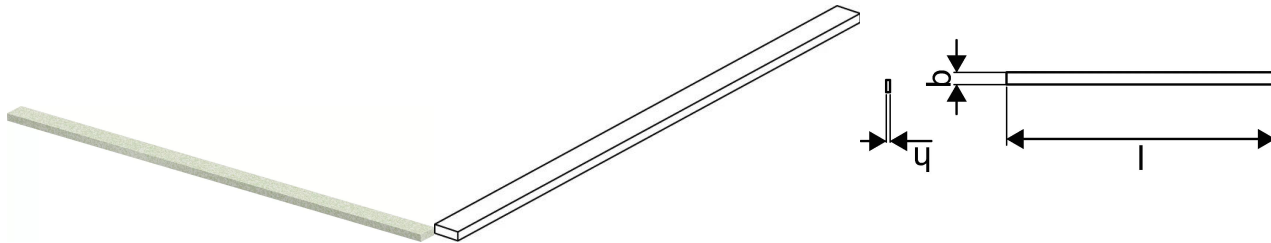

About Uponor Siccus Mini edge support

Specification

- Uponor Siccus Mini is a dry installation UFH system in low profile design, with prefabricated full-surface integrated heat conducting layer made of aluminium; according to EN 1264; design B.
- Panels made from XPS 400 with pipe spacing 100mm
- For installation with Uponor Comfort Pipe 9.9mm

Application


- radiant underfloor heating and cooling for dry-build installations
- direct flooring with laminate, wood parquet
- extra tilebacker layer 6mm for ceramic tiles and natural stone
- specified gypsum board for vinyl and carpet flooring

Certification

- DINCERTCO 7F515-F (laminate, wood parquet)
- DINCERTCO 7F514-F (ceramic tiles, natural stone)
- DINCERTCO 7FXXX-F (18mm gypsum layer for vinyl and carpet)

Uponor Siccus Mini edge support 1000x45x15mm

1139794

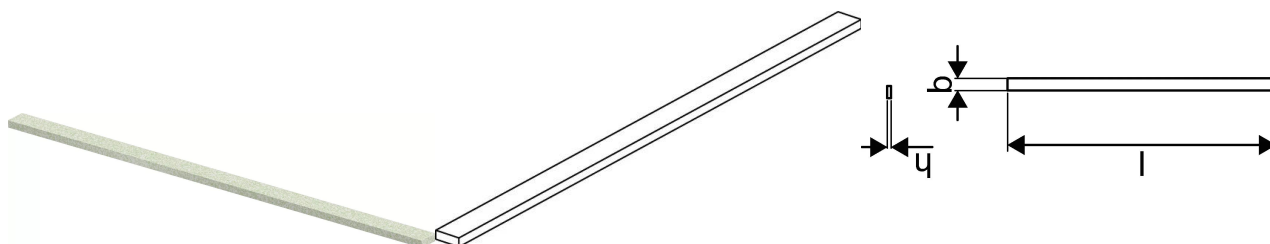

Technical data

Item no EAN	6414900321464
Item no GTIN	06414900321464
RSK no.	3001005
Item no NRF	8361347
Item no LVI	2022241
Item (unit of measurement)	m
Length (l)	1000 mm
Z-measurement b	45 mm
Z-measurement h	15 mm
Packaging Quantity 1	10
Packaging Quantity 4	800
Packaging Material short PL1	PAP
Packaging Material PL1	Corrugated fibreboard
Packaging GTIN PL1	06414900380706
Packaging GTIN PL4	06414900380737
Item Unit Height	15 mm
Item Unit Weight	0,54 kg
Item Unit Width	45 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb