


## Uponor Vario S manifold FM 3xG3/4 Euro - G1

**1140834**

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps
- With primary connection G1

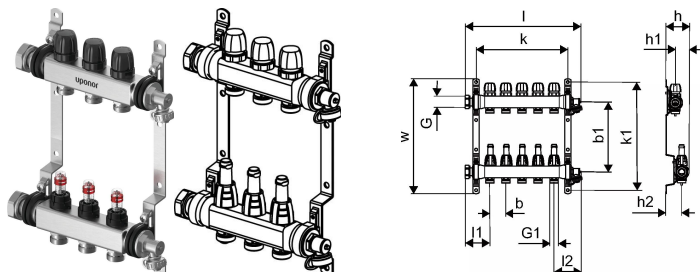

### About Uponor Vario S manifold FM

#### Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- For use with with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold FM 3xG3/4 Euro - G1

1140834

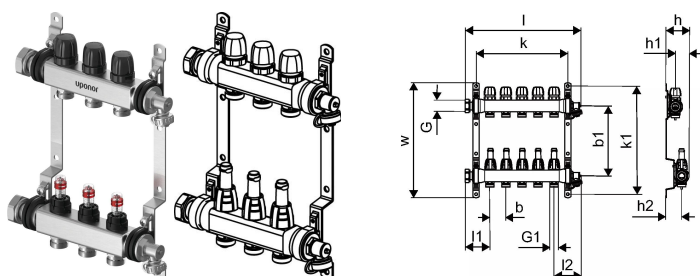

### Status

Item Available From date

2024-05-01

### Product code

Item no EAN	6414900440417
Item no GF	35001140834
Item no GTIN	06414900440417
Item no LVI	2022291
Item no NRF	8361361

### Dimensions

Item Unit Height	40
Item Unit Length	260
Item Unit Weight	2,5
Item Unit Width	235
Item_UOM	pce

### Measurements

LENGTH_L	264
Length (l1)	77
Length (l2)	87
Z Measurement b	50
Z Measurement b1	217
Z Measurement h	73
Z Measurement h1	30
Z Measurement h2	50
Z Measurement k	185
Z Measurement k1	336
Z Measurement w	357

### Packaging

Packaging GTIN PL1

06414900500739

Packaging GTIN PL4	06414900501224
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	570
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	108
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00584022
Packaging Volume PL4	0,95616
Packaging Weight PL1	2,8
Packaging Weight PL4	327
Packaging Width PL1	218
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
 WD18 8GA, Watford  
 UK

T +44 (0)1923 927000  
 E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)