


## Uponor Vario S manifold FM 10xG3/4 Euro - G1

**1140841**

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps
- With primary connection G1

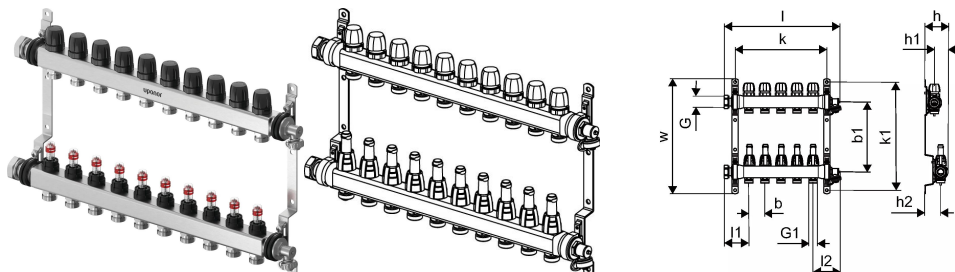

### About Uponor Vario S manifold FM

#### Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- For use with with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold FM 10xG3/4 Euro - G1

1140841

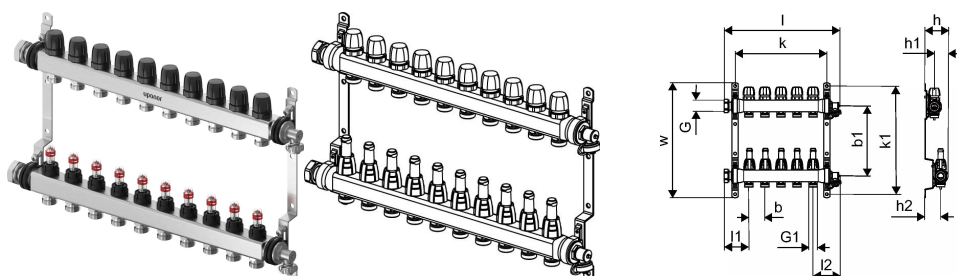

### Status

Item Available From date

2024-05-01

### Product code

Item no EAN 6414900440486

Item no GF 35001140841

Item no GTIN 06414900440486

Item no LVI 2022298

Item no NRF 8361368

### Dimensions

Item Unit Height 40

Item Unit Length 610

Item Unit Weight 6

Item Unit Width 235

Item\_UOM pce

### Measurements

LENGTH\_L 614

Length (l1) 77

Length (l2) 87

Z Measurement b 50

Z Measurement b1 217

Z Measurement h 73

Z Measurement h1 30

Z Measurement h2 50

Z Measurement k 535

Z Measurement k1 336

Z Measurement w 357

### Packaging

Packaging GTIN PL1

06414900500807

Packaging GTIN PL4	06414900322966
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	767
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	54
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,011463582
Packaging Volume PL4	0,95616
Packaging Weight PL1	6,2
Packaging Weight PL4	360
Packaging Width PL1	318
Packaging Width PL4	800

## Technical documents

Download documents here

### Uponor UK

Blackmor Lane The Pavilion  
 WD18 8GA, Watford  
 UK

T +44 (0)1923 927000  
 E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)