


Uponor Vario S manifold FM 11xG3/4 Euro - G1

1140842

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps
- With primary connection G1

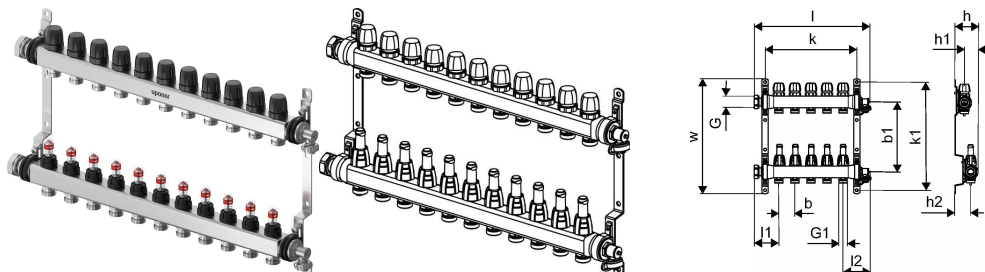

About Uponor Vario S manifold FM

Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- For use with with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM 11xG3/4 Euro - G1

1140842

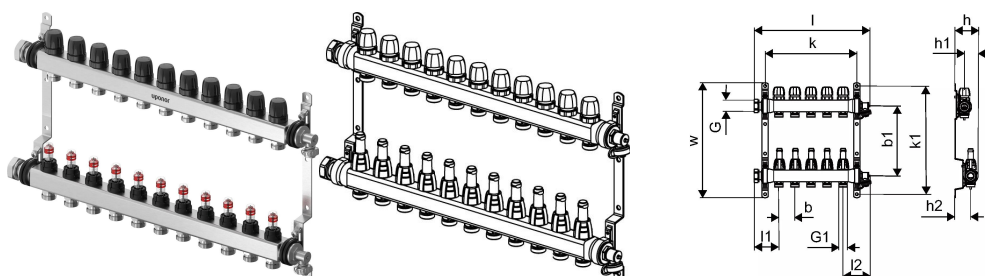

Status

Item Available From date

2024-05-01

Product code

Item no EAN 6414900440493

Item no GF 35001140842

Item no GTIN 06414900440493

Item no LVI 2022299

Item no NRF 8361369

Dimensions

Item Unit Height 40

Item Unit Length 660

Item Unit Weight 6,5

Item Unit Width 235

Item_UOM pce

Measurements

LENGTH_L 664

Length (l1) 77

Length (l2) 87

Z Measurement b 50

Z Measurement b1 217

Z Measurement h 73

Z Measurement h1 30

Z Measurement h2 50

Z Measurement k 585

Z Measurement k1 336

Z Measurement w 357

Packaging

Packaging GTIN PL1

06414900500814

Packaging GTIN PL4	06414900322973
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	767
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	54
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,011463582
Packaging Volume PL4	0,95616
Packaging Weight PL1	6,6
Packaging Weight PL4	381,4
Packaging Width PL1	318
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
 WD18 8GA, Watford
 UK

T +44 (0)1923 927000
 E enquiries.uk@uponor.com

www.uponor.com/en-gb