


Uponor Vario S manifold FM 12xG3/4 Euro - G1

1140843

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps
- With primary connection G1

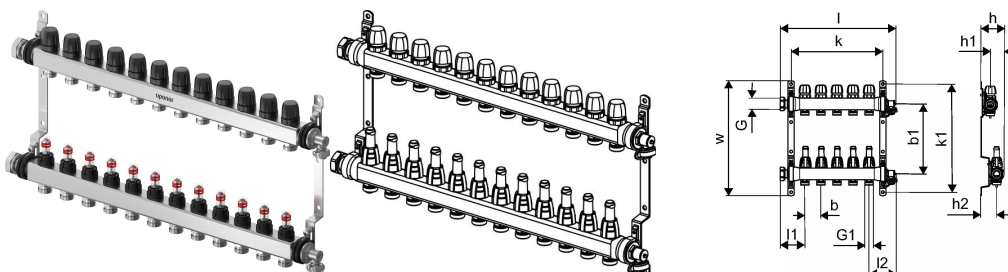

About Uponor Vario S manifold FM

Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm

Application

- For underfloor-heating and -cooling
- For use with with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

Uponor Vario S manifold FM 12xG3/4 Euro - G1

1140843

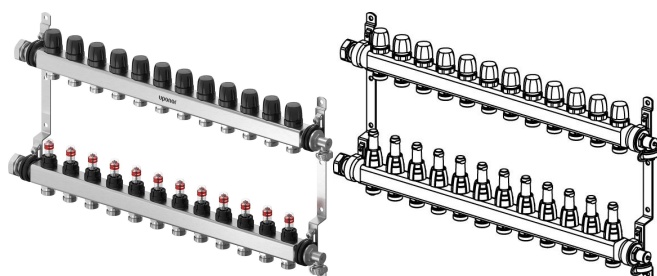

Status

Item Available From date

2024-05-01

Product code

Item no EAN	6414900440509
Item no GF	35001140843
Item no GTIN	06414900440509
Item no LVI	2022300
Item no NRF	8361371
Item no VVS	8361371

Dimensions

Item Unit Height	40
Item Unit Length	710
Item Unit Weight	7
Item Unit Width	235
Item_UOM	pce

Measurements

LENGTH_L	714
Length (l1)	77
Length (l2)	87
Z Measurement b	50
Z Measurement b1	217
Z Measurement h	73
Z Measurement h1	30
Z Measurement h2	50
Z Measurement k	635
Z Measurement k1	336
Z Measurement w	357

Packaging

Packaging GTIN PL1	06414900500821
Packaging GTIN PL4	06414900322980
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	767
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	54
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,011463582
Packaging Volume PL4	0,95616
Packaging Weight PL1	7,1
Packaging Weight PL4	408,4
Packaging Width PL1	318
Packaging Width PL4	800

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
 WD18 8GA, Watford
 UK

T +44 (0)1923 927000
 E enquiries.uk@uponor.com

www.uponor.com/en-gb