


## Uponor Vario S manifold FM 13xG3/4 Euro - G1

**1140844**

- Supply beam with flowmeters for balancing and shutoff, with memory ring
- Return beam with valves for shutoff, with hand caps

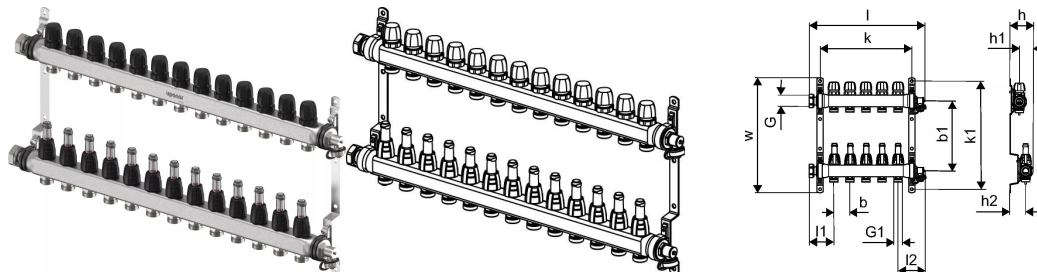

### About Uponor Vario S manifold FM

#### Specification


- Made of stainless steel
- With integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill&drain points in supply and return,
- Loop connection G3/4" eurocone
- Loop pitch 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- Applicable with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold FM 13xG3/4 Euro - G1

1140844

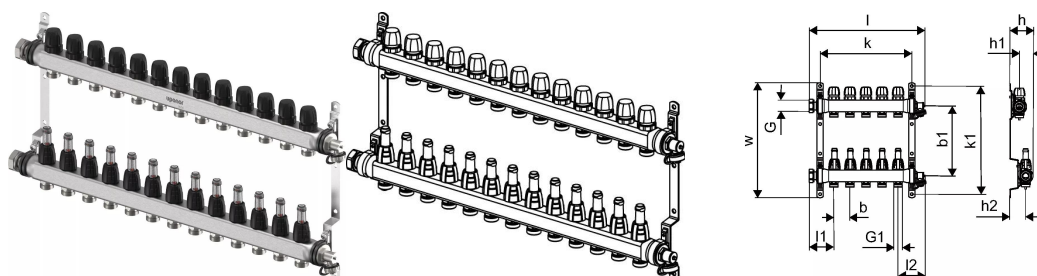

### Technical data

Item no EAN	6414900440516
Item no GTIN	06414900440516
Item (unit of measurement)	pce
Length (l)	764 mm
Length (l1)	77 mm
Length (l2)	87 mm
Z-measurement b	50 mm
Z-measurement b1	217 mm
Z-measurement h	73 mm
Z-measurement h1	30 mm
Z-measurement h2	50 mm
Z-measurement k	685 mm
Z-measurement k1	336 mm
Z-measurement w	357 mm
Packaging Quantity 1	1
Packaging Quantity 4	36
Packaging GTIN PL1	06414900500838
Packaging GTIN PL4	06414900322997
Item Unit Height	40 mm
Item Unit Weight	7,5 kg
Item Unit Width	235 mm

### Technical documents

[Download documents here](#)

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)