


## Uponor Vario S manifold LS 6xG3/4 Euro - G1

**1140867**

- Supply beam with lock shield valves for balancing and shutoff
- Return beam with valves for shutoff, with hand caps
- With primary connection G1

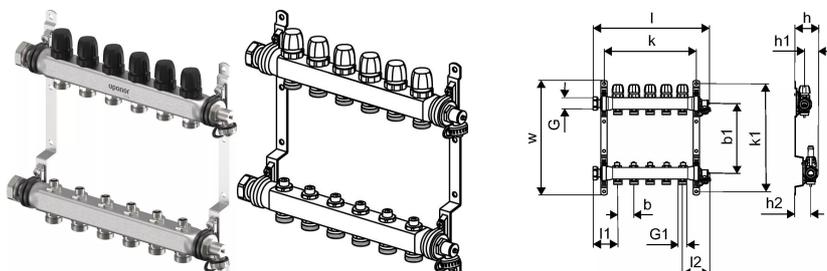

### About Uponor Vario S manifold LS

#### Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- For use with with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold LS 6xG3/4 Euro - G1

1140867

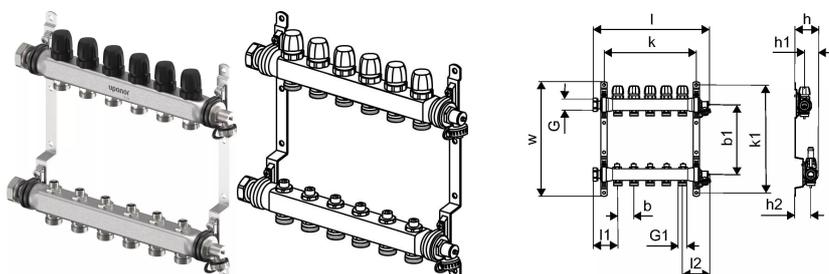

### Status

Item Available From date

2024-05-01

### Product code

Item no EAN	6414900440745
Item no GF	35001140867
Item no GTIN	06414900440745
Item no LVI	2022250
Item no NRF	8361376
Item no VVS	046230106

### Dimensions

Item Unit Height	40
Item Unit Length	410
Item Unit Weight	4,1
Item Unit Width	235
Item_UOM	pce

### Measurements

Length (l1)	414
Length (l2)	87
Z Measurement b	50
Z Measurement b1	217
Z Measurement h	73
Z Measurement h1	30
Z Measurement h2	50
Z Measurement k	335
Z Measurement k1	336
Z Measurement w	357

### Packaging

Packaging GTIN PL1

06414900500913

Packaging GTIN PL4	06414900323024
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	467
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	90
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,006979782
Packaging Volume PL4	0,95616
Packaging Weight PL1	4,2
Packaging Weight PL4	403
Packaging Width PL1	318
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)