


## Uponor Vario S manifold LS 12xG3/4 Euro - G1

**1140873**

- Supply beam with lock shield valves for balancing and shutoff
- Return beam with valves for shutoff, with hand caps
- With primary connection G1

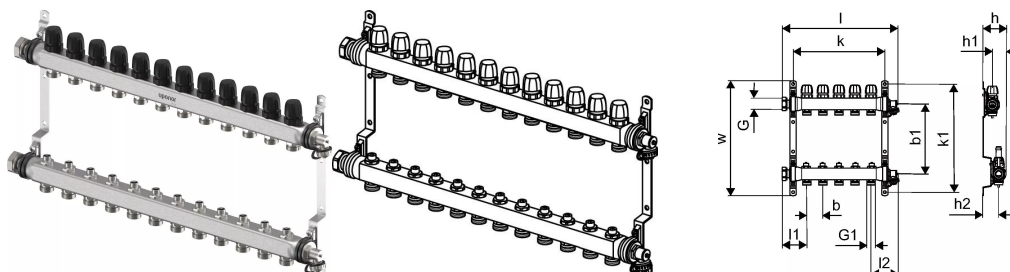

### About Uponor Vario S manifold LS

#### Specification



- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm

#### Application

- For underfloor-heating and -cooling
- For use with with actuators 1141676 (230V) and 1141677 (24V)
- Max. pressure: 6 bar at 60°C

## Uponor Vario S manifold LS 12xG3/4 Euro - G1

1140873

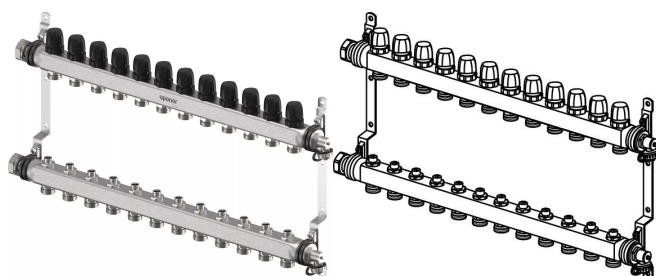

### Status

Item Available From date

2024-05-01

### Product code

Item no EAN	6414900440806
Item no GF	35001140873
Item no GTIN	06414900440806
Item no LVI	2022256
Item no NRF	8361383
Item no VVS	046230112

### Dimensions

Item Unit Height	40
Item Unit Length	710
Item Unit Weight	6,9
Item Unit Width	235
Item_UOM	pce

### Measurements

Length (l1)	714
Length (l2)	87
Z Measurement b	50
Z Measurement b1	217
Z Measurement h	73
Z Measurement h1	30
Z Measurement h2	50
Z Measurement k	635
Z Measurement k1	336
Z Measurement w	357

### Packaging

Packaging GTIN PL1

06414900500975

Packaging GTIN PL4	06414900323086
Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	767
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	54
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,011463582
Packaging Volume PL4	0,95616
Packaging Weight PL1	7
Packaging Weight PL4	403
Packaging Width PL1	318
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
 WD18 8GA, Watford  
 UK

T +44 (0)1923 927000  
 E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)