
Product data sheet




GF Uponor Vario S manifold LS 13xG3/4 Euro - G1

1140874

- Supply beam with lock shield valves for balancing and shutoff
- Return beam with valves for shutoff, with hand caps
- With primary connection G1

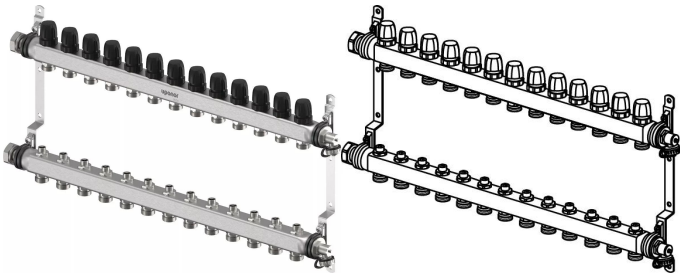



About GF Uponor Vario S manifold LS

Specification


- Made of stainless steel, with integrated valves
- Connection right or left with flat sealing
- Integrated airvents and fill & drain points in supply/return
- Loop connection G3/4" Eurocone c-c 50 mm
- Header pitch 215 mm
- Compatible with pump group Item No.1094185
- Actuator 230v Item No. 1141676
- Actuator 24v Item No. 1141677


Application

- For underfloor-heating and -cooling
- Max. pressure: 6 bar at 60°C

GF Uponor Vario S manifold LS 13xG3/4 Euro - G1

1140874

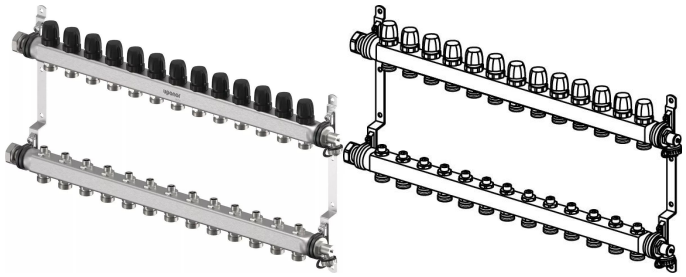

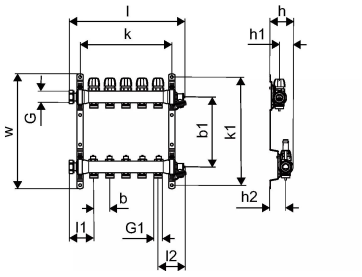

Status

Item Available From date	2024-05-01

Product code

Item no EAN	6414900440813
Item no GTIN	06414900440813
Item no VVS	046230113

Dimensions

Item Unit Height	40
Item Unit Length	760
Item Unit Weight	7,4
Item Unit Width	235
Item_UOM	pce

Measurements

Length (l1)	764
Length (l2)	87
Z Measurement b	50
Z Measurement b1	217
Z Measurement h	73
Z Measurement h1	30
Z Measurement h2	50
Z Measurement k	685
Z Measurement k1	336
Z Measurement w	357

Packaging

Packaging GTIN PL1	06414900500982
Packaging GTIN PL4	06414900323093

Packaging Height PL1	47
Packaging Height PL4	996
Packaging Length PL1	967
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	36
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,014452782
Packaging Volume PL4	0,95616
Packaging Weight PL1	7,7
Packaging Weight PL4	302
Packaging Width PL1	318
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+