


Uponor Vario manifold flowmeter 0-5l/min

1140963

- For Vario S
- Flow range 0-5 l/min

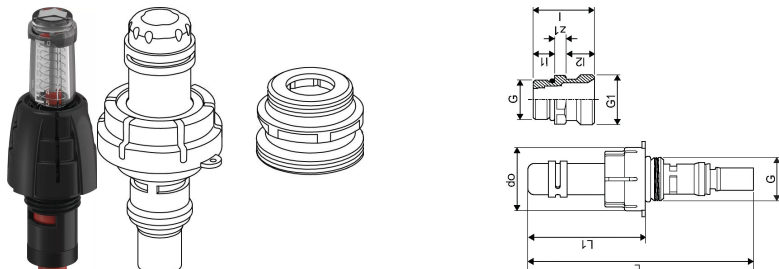

About Uponor Vario manifold flowmeter

Specification


- Components made of brass, nickel-plated brass, steel, and engineered plastics
- Eurocone, threaded, and flat-sealing connections
- Compatible with Vario B, C, S, M, PLUS, and MAGNA manifolds
- Includes valves, flowmeters, air vents, actuators, and adapters
- Designed for heating and cooling applications

Application

- To compliment/extend Vario manifold installations
- Flow regulation, balancing, and shut-off
- Connection of PEX, MLCP, and composite pipes
- Integration of actuators, sensors, and control units
- Commissioning, maintenance, and system optimization

Uponor Vario manifold flowmeter 0-5l/min

1140963

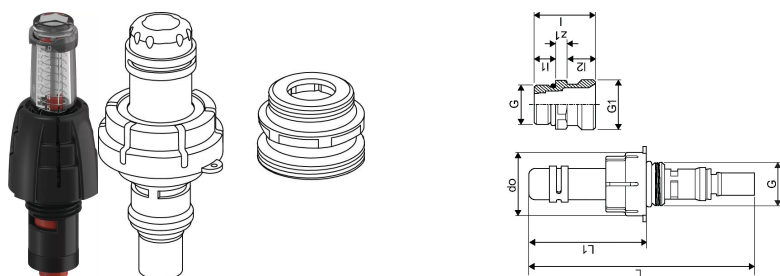

Measurements

Cylindric_thread_G	1/2
LENGTH_L	101
Length (l1)	67,8
Outer Diameter_do	36

Product code

Item no EAN	6414900499002
Item no GF	35001140963
Item no GTIN	06414900499002
Item no LVI	2022268
Item no NRF	8361384
Item no VVS	046230425

Dimensions

Item Unit Height	36
Item Unit Length	101
Item Unit Weight	0,05
Item Unit Width	36
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900501170
Packaging GTIN PL2	06414900501194
Packaging Height PL1	37
Packaging Height PL2	150
Packaging Length PL1	120
Packaging Length PL2	150
Packaging Quantity PL1	1
Packaging Quantity PL2	20
Packaging Type PL1	Plastic_Bag

Packaging Type PL2	Medium_Box
Packaging Volume PL1	0,000222
Packaging Volume PL2	0,0023625
Packaging Weight PL1	0,07
Packaging Weight PL2	1,7
Packaging Width PL1	50
Packaging Width PL2	105

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb