


Uponor Vario PLUS actuator NC MT 230V 1W IP54

1141678

- Vario PLUS, MAGNA manifold actuator
- first open function,
- height: 61 mm + adaptor ring
- stroke length: 5mm
- connection cable: 2x 0.75mm²x1m

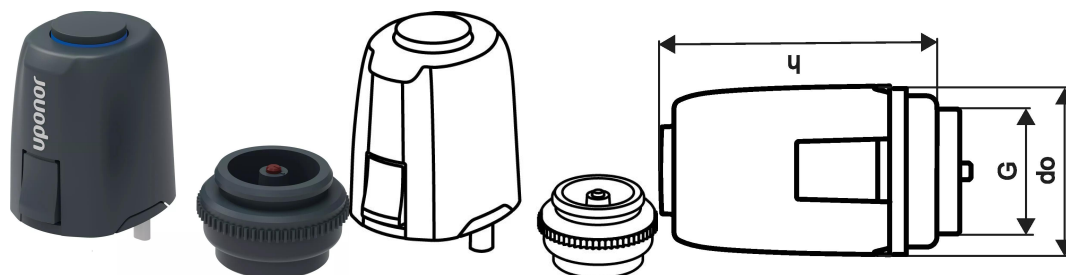

About Uponor Vario PLUS actuator NC

Specification

- Modular fibre glass reinforced polyamide manifold with 1,3,4,6 loops for connection with basic kit
- connection right or left with flat sealing or connection from below with optional elbowset
- supply with lockshield (LS) valve for balancing with adjusting ring or supply with Flowmeter (FM) for balancing
- shut-off and flow view
- adjusting ring for balancing without tools
- prepared places for room name labels
- return with valves and caps, prepared for actuators
- loop connection G3/4" eurocone
- loop pitch 50 mm
- header pitch 225 mm

Actuator:

- NC (normally closed) = closes without power

Application


- for underfloor heating and cooling
- combineable with actuators MT 30x1,5

Certification

- CE

Uponor Vario PLUS actuator NC MT 230V 1W IP54

1141678

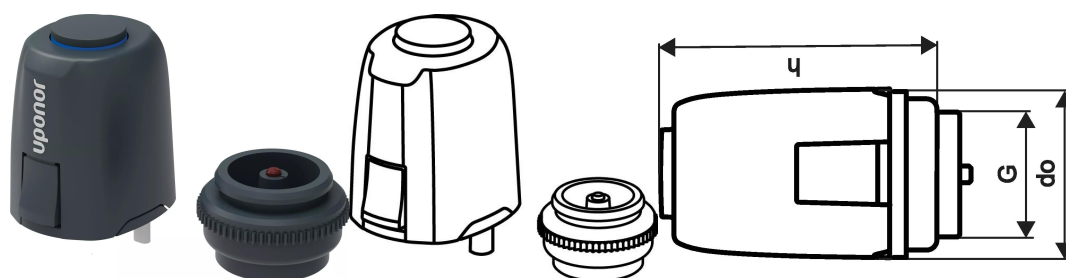

Technical data

| | |
|----------------------------|----------------|
| Item no EAN | 6414900383783 |
| Item no GTIN | 06414900383783 |
| Item no VVS | 466235530 |
| RSK no. | 2973123 |
| Item no NRF | 8361388 |
| Item no LVI | 2022272 |
| Item (unit of measurement) | pce |
| Z-measurement h | 83 mm |
| Packaging Quantity 1 | 1 |
| Packaging Quantity 4 | 100 |
| Packaging Quantity 4 | 1200 |
| Packaging GTIN PL1 | 06414900383844 |
| Packaging GTIN PL2 | 06414900385374 |
| Packaging GTIN PL4 | 06414900385404 |
| Item Unit Height | 83 mm |
| Item Unit Weight | 0,12 kg |
| Item Unit Width | 30 mm |

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb