


Uponor S-Press PLUS adapter swivel nut 16-G1/2"FT 15mm

1141873

- Connection of Uni-Pipe PLUS pipes to standard BS EN 1254-2 compression bodies without using a compression connection
- Made of tin-plated DZR brass
- Press without bevel
- Demountable and resealable screw connector for standard 15mm BS EN 1254-2 compression bodies
- Thread acc. to BS EN ISO 228-1.

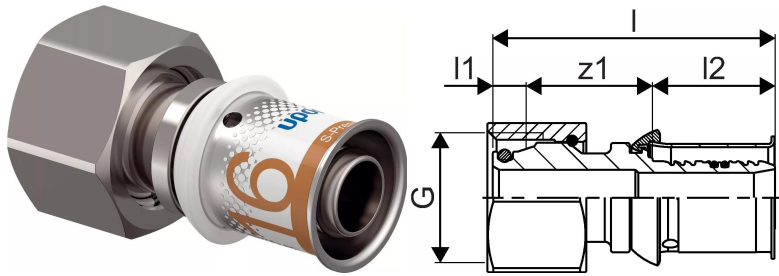

About Uponor S-Press PLUS adapter swivel nut

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press PLUS adapter swivel nut 16-G1/2"FT 15mm

1141873

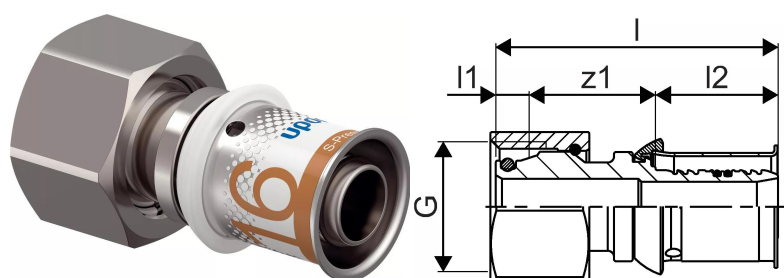

Measurements

Cylindric_thread_G	1/2
LENGTH_L	48
Length (l1)	6,4
Length (l2)	21,9
z1	19,4

Product code

Item no EAN	6414900385541
Item no GTIN	06414900385541

Dimensions

Item Unit Height	24
Item Unit Length	48
Item Unit Weight	0,0732
Item Unit Width	27
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900444422
Packaging GTIN PL3	06414900444491
Packaging GTIN PL4	06414900444569
Packaging Height PL1	89
Packaging Height PL3	188
Packaging Height PL4	708
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840

Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,67968
Packaging Weight PL1	0,749
Packaging Weight PL3	6,122
Packaging Weight PL4	318,856
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb