
# Product data sheet



# GF Uponor S-Press PLUS adapter swivel nut 16-G1/2"FT 15

## 1141873

- Connection of Uni-Pipe PLUS pipes to standard BS EN 1254-2 compression bodies without using a compression connection
- Made of tin-plated DZR brass
- Press without bevel
- Demountable and resealable screw connector for standard 15mm BS EN 1254-2 compression bodies
- Thread acc. to BS EN ISO 228-1.

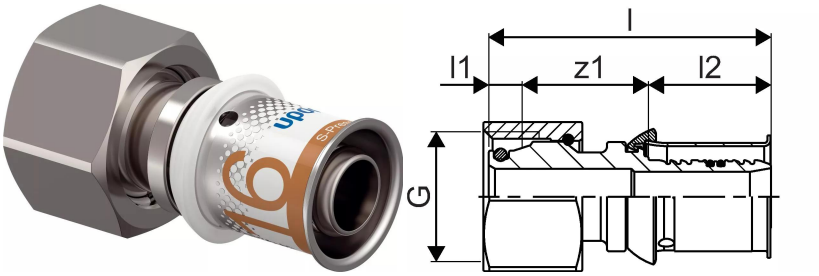

# About GF Uponor S-Press PLUS adapter swivel nut

## Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

## Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

# GF Uponor S-Press PLUS adapter swivel nut 16-G1/2"FT 15

## 1141873

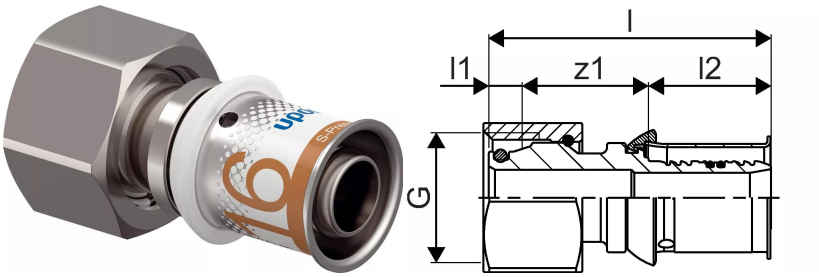


### Measurements

| | |
|---|---|
| Cylindric_thread_G | 1/2 |
| LENGTH_L | 48 |
| Length (l1) | 6,4 |
| Length (l2) | 21,9 |
| z1 | 19,4 |

### Product code

| | |
|---|---|
| Item no EAN | 6414900385541 |
| Item no GTIN | 06414900385541 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 24 |
| Item Unit Length | 48 |
| Item Unit Weight | 0,073 |
| Item Unit Width | 27 |
| Item_UOM | pce |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414900444422 |
| Packaging GTIN PL3 | 06414900444491 |
| Packaging GTIN PL4 | 06414900444569 |
| Packaging Height PL1 | 89 |
| Packaging Height PL3 | 188 |
| Packaging Height PL4 | 708 |
| Packaging Length PL1 | 176 |
| Packaging Length PL3 | 277 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 10 |

| | |
|---|---|
| Packaging Quantity PL3 | 80 |
| Packaging Quantity PL4 | 3840 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,001049488 |
| Packaging Volume PL3 | 0,009321604 |
| Packaging Volume PL4 | 0,67968 |
| Packaging Weight PL1 | 0,756 |
| Packaging Weight PL3 | 6,122 |
| Packaging Weight PL4 | 318,85 |
| Packaging Width PL1 | 67 |
| Packaging Width PL3 | 179 |
| Packaging Width PL4 | 800 |

## Technical documents

Download documents here

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**




**Uponor UK**

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb


+GF+