


Uponor Siccus 16 panel EPS DEO 1200x600x20mm

1143475

- Installation with full-face heat transfer layer of Aluminium
- With integrated pipe grooves c-c 150mm
- EPS compressive strength: 400 kPa

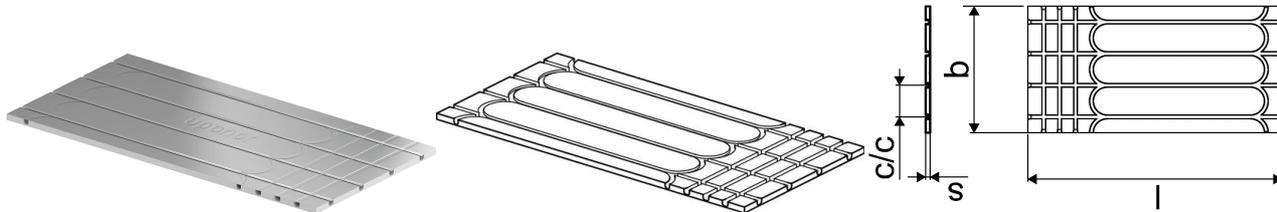

About Uponor Siccus 16 panel EPS DEO

Specification

- Siccus 16 underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium foil.
- Fire class E to BS EN 13501-1
- Application type acc. DIN 4108-10: DEO
- life load acc. EN 1991-1-1 = 2,0 kN/m²
- for installations with pipe c-c 150mm
- for pipe dim 16mm

Application


- Radiant underfloor heating and cooling
- For dry-build installations

Certification

- DIN CERTCO

Uponor Siccus 16 panel EPS DEO 1200x600x20mm

1143475

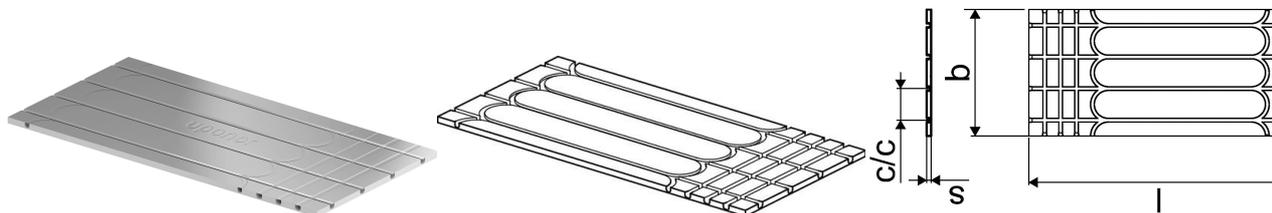

Status

Item Available From date

2025-01-01

Product code

Item no EAN

6414900503709

Item no GTIN

06414900503709

Dimensions

Item Unit Height

20

Item Unit Length

1200

Item Unit Weight

1,1524

Item Unit Width

600

Item_UOM

m²

Measurements

LENGTH_L

1200

Z Measurement b

600

Z MEASUREMENT S

20

Packaging

Packaging GTIN PL1

06414900389457

Packaging GTIN PL4

06414900389464

Packaging Height PL1

627

Packaging Height PL4

1250

Packaging Length PL1

1221

Packaging Length PL4

1254

Packaging Quantity PL1

7.2

Packaging Quantity PL4

72

Packaging Type PL1

Base_Box

Packaging Type PL4

Pallet

Packaging Volume PL1

0,169955874

Packaging Volume PL4

1,9139175

Packaging Weight PL1	9,29728
Packaging Weight PL4	117,9728
Packaging Width PL1	222
Packaging Width PL4	1221

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb