


## Uponor Siccus panel EPS DEO 16 1200x600x20mm

**1143475**

- Installation with full-face heat transfer layer of Aluminium
- With integrated pipe grooves c-c 150mm
- EPS compressive strength: 400 kPa

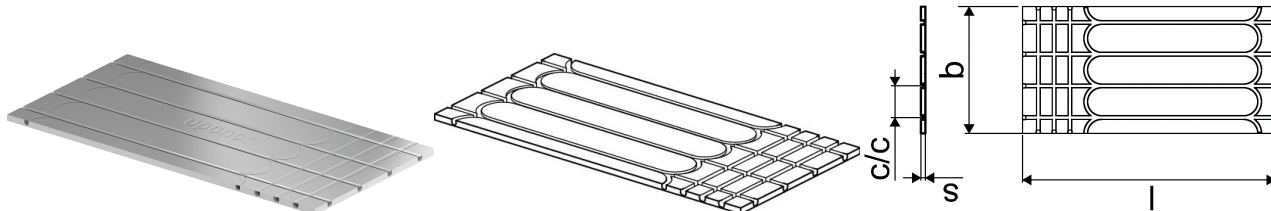

### About Uponor Siccus panel EPS DEO 16

#### Specification

- Siccus 16 underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium foil.
- Fire class E to BS EN 13501-1
- Application type acc. DIN 4108-10: DEO
- life load acc. EN 1991-1-1 = 2,0 kN/m<sup>2</sup>
- for installations with pipe c-c 150mm
- for pipe dim 16mm

#### Application


- Radiant underfloor heating and cooling
- For dry-build installations

#### Certification

- DIN CERTCO

## Uponor Siccus panel EPS DEO 16 1200x600x20mm

1143475

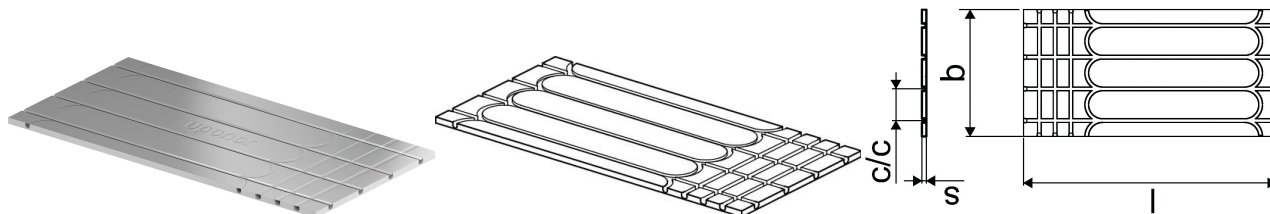

### Status

Item Available From date

2025-01-01

### Product code

Item no EAN 6414900503709

Item no GTIN 06414900503709

### Dimensions

Item Unit Height 20

Item Unit Length 1200

Item Unit Weight 1,152

Item Unit Width 600

Item\_UOM m<sup>2</sup>

### Measurements

LENGTH\_L 1200

Z Measurement b 600

Z MEASUREMENT S 20

### Packaging

Packaging GTIN PL1 06414900389457

Packaging GTIN PL4 06414900389464

Packaging Height PL1 627

Packaging Height PL4 1250

Packaging Length PL1 1221

Packaging Length PL4 1254

Packaging Quantity PL1 7.2

Packaging Quantity PL4 72

Packaging Type PL1 Base\_Box

Packaging Type PL4 Pallet

Packaging Volume PL1 0,169955874

Packaging Volume PL4 1,9139175

|                      |          |
|----------------------|----------|
| Packaging Weight PL1 | 9,29728  |
| Packaging Weight PL4 | 117,9728 |
| Packaging Width PL1  | 222      |
| Packaging Width PL4  | 1221     |

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E  
customerservice.uk.bfs@georgfi  
scher.com