Product data sheet





GF Uponor Siccus panel EPS DEO 16 1200x600x20

1143475

- Installation with full-face heat transfer layer of Aluminium
- With integrated pipe grooves c-c 150mm
- EPS compressive strength: 400 kPa



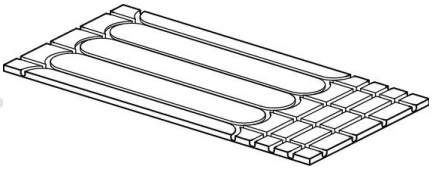

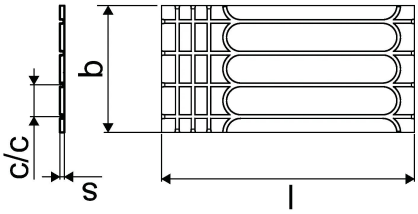

About GF Uponor Siccus panel EPS DEO 16

Specification

- Siccus 16 underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium foil.
- Fire class E to BS EN 13501-1
- Application type acc. DIN 4108-10: DEO
- life load acc. EN 1991-1-1 = 2,0 kN/m²
- for installations with pipe c-c 150mm
- for pipe dim 16mm

Application


- Radiant underfloor heating and cooling
- For dry-build installations

Certification

- DIN CERTCO

GF Uponor Siccus panel EPS DEO 16 1200x600x20

1143475

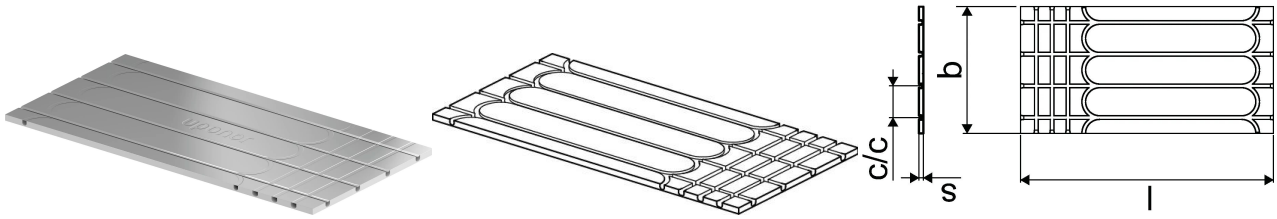

Status

Item Available From date	2025-01-01

Product code

Item no EAN	6414900503709
Item no GTIN	06414900503709

Dimensions

Item Unit Height	20
Item Unit Length	1200
Item Unit Weight	1,152
Item Unit Width	600
Item_UOM	m²

Measurements

LENGTH_L	1200
Z Measurement b	600
Z MEASUREMENT S	20

Packaging

Packaging GTIN PL1	06414900389457
Packaging GTIN PL4	06414900389464
Packaging Height PL1	627
Packaging Height PL4	1250
Packaging Length PL1	1221
Packaging Length PL4	1254
Packaging Quantity PL1	7.2
Packaging Quantity PL4	72
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet

Packaging Volume PL1	0,169955874
Packaging Volume PL4	1,9139175
Packaging Weight PL1	9,29728
Packaging Weight PL4	117,9728
Packaging Width PL1	222
Packaging Width PL4	1221

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+