
Product data sheet



GF Uponor S-Press PLUS Adapter M+V 16-15CU-SST

1145403

- Adapter fit to Copper and Stainless-steel pipes using pressing jaw type M or V (metal press connection)
- Must use Uponor Multilayer press jaws on the Multilayer connection
- Made of DZR brass (lead free)
- With fixed press sleeve, stop ring, pressed identification, colour code and test safety
- Press without bevel (Multilayer connection)

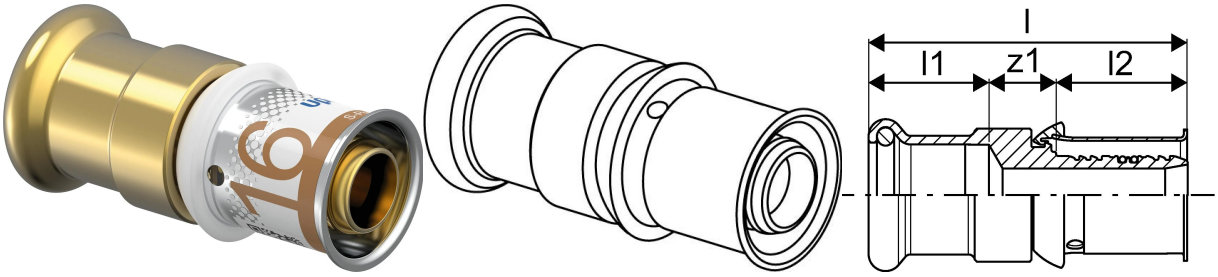

About GF Uponor S-Press PLUS Adapter M+V

Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press PLUS Adapter M+V 16-15CU-SST

1145403

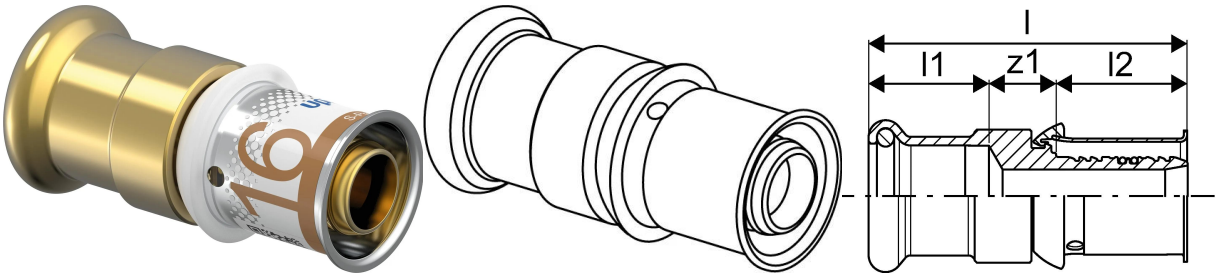

Status

Item Available From date	2025-03-01

Product code

Item no EAN	6414900390033
Item no GF	35001145403
Item no GTIN	06414900390033
Item no LVI	1720861
Item no RSK	1885648

Dimensions

Item Unit Height	23
Item Unit Length	48
Item Unit Weight	0,043
Item Unit Width	23
Item_UOM	pce

Measurements

LENGTH_L	48
Length (l1)	18
Length (l2)	20
z1	10

Packaging

Packaging GTIN PL1	06414900390361
Packaging GTIN PL3	06414900448444
Packaging GTIN PL4	06414900445962
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	714

Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	0,893
Packaging Weight PL3	3,672
Packaging Weight PL4	375
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+