
# Product data sheet



# GF Uponor S-Press PLUS Adapter M+V 25-22CU-SST

## 1145405

- Adapter fit to Copper and Stainless-steel pipes using pressing jaw type M or V (metal press connection)
- Must use Uponor Multilayer press jaws on the Multilayer connection
- Made of DZR brass (lead free)
- With fixed press sleeve, stop ring, pressed identification, colour code and test safety
- Press without bevel (Multilayer connection)

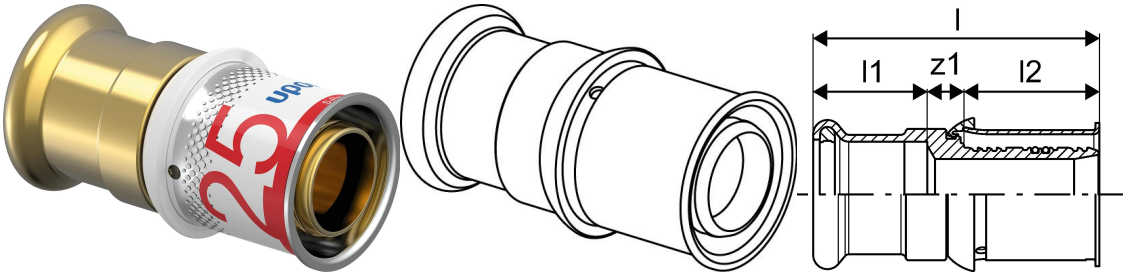

# About GF Uponor S-Press PLUS Adapter M+V

## Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

## Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

## Certification

UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

# GF Uponor S-Press PLUS Adapter M+V 25-22CU-SST

## 1145405

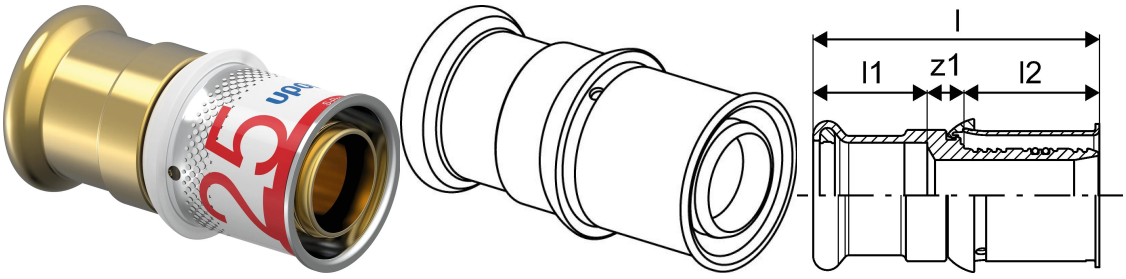


### Status

| | |
|---|---|
| Item Available From date | 2025-03-01 |

### Product code

| | |
|---|---|
| Item no EAN | 6414900390057 |
| Item no GF | 35001145405 |
| Item no GTIN | 06414900390057 |
| Item no LVI | 1720863 |
| Item no RSK | 1885651 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 31 |
| Item Unit Length | 60 |
| Item Unit Weight | 0,093 |
| Item Unit Width | 31 |
| Item_UOM | pce |

### Measurements

| | |
|---|---|
| LENGTH_L | 60 |
| Length (l1) | 24 |
| Length (l2) | 28 |
| z1 | 8 |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414900390385 |
| Packaging GTIN PL3 | 06414900448468 |
| Packaging GTIN PL4 | 06414900445986 |
| Packaging Height PL1 | 89 |
| Packaging Height PL3 | 95 |
| Packaging Height PL4 | 714 |

| | |
|---|---|
| Packaging Length PL1 | 176 |
| Packaging Length PL3 | 277 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 10 |
| Packaging Quantity PL3 | 40 |
| Packaging Quantity PL4 | 3840 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,001049488 |
| Packaging Volume PL3 | 0,004710385 |
| Packaging Volume PL4 | 0,68544 |
| Packaging Weight PL1 | 0,968 |
| Packaging Weight PL3 | 3,972 |
| Packaging Weight PL4 | 404 |
| Packaging Width PL1 | 67 |
| Packaging Width PL3 | 179 |
| Packaging Width PL4 | 800 |

## Technical documents

Download documents here

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**




**Uponor UK**

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb


+GF+