


## Uponor S-Press PLUS Adapter M+V 25-22CU-SST

1145405

- Adapter fit to Copper and Stainless-steel pipes using pressing jaw type M or V (metal press connection)
- Must use Uponor Multilayer press jaws on the Multilayer connection
- Made of DZR brass (lead free)
- With fixed press sleeve, stop ring, pressed identification, colour code and test safety
- Press without bevel (Multilayer connection)

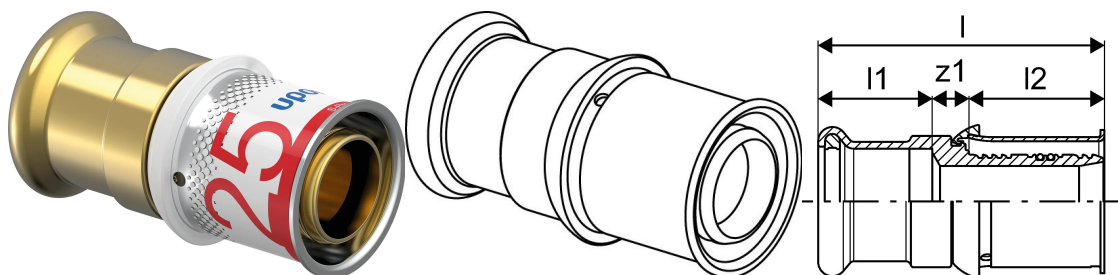

## About Uponor S-Press PLUS Adapter M+V

### Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification


UK Reg4 approval

- WRAS or
- KIWA

to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press PLUS Adapter M+V 25-22CU-SST

1145405

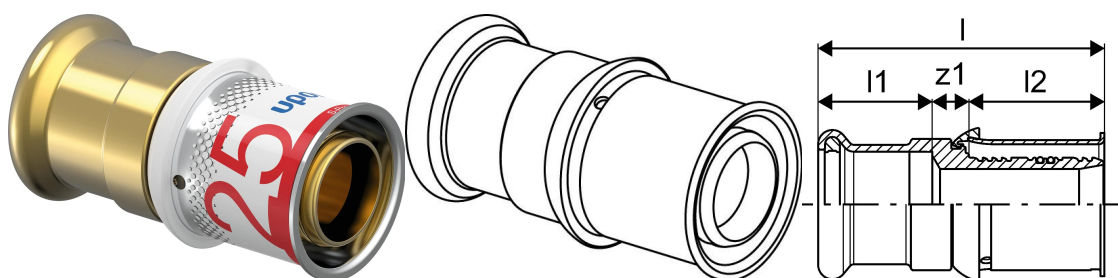

### Status

Item Available From date

2025-03-01

### Product code

Item no EAN	6414900390057
Item no GF	35001145405
Item no GTIN	06414900390057
Item no LVI	1720863
Item no RSK	1885651

### Dimensions

Item Unit Height	31
Item Unit Length	60
Item Unit Weight	0,093
Item Unit Width	31
Item_UOM	pce

### Measurements

LENGTH_L	60
Length (l1)	24
Length (l2)	28
z1	8

### Packaging

Packaging GTIN PL1	06414900390385
Packaging GTIN PL3	06414900448468
Packaging GTIN PL4	06414900445986
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	714
Packaging Length PL1	176
Packaging Length PL3	277

Packaging Length PL4	1200
Packaging Quantity PL1	10
Packaging Quantity PL3	40
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	0,968
Packaging Weight PL3	3,972
Packaging Weight PL4	404
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

## Technical documents

Download documents here

### Uponor UK

Blackmor Lane The Pavilion  
 WD18 8GA, Watford  
 UK

T +44 (0)1923 927000  
 E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)