
Product data sheet



GF Hycleen AS coupling M12-M12

1149716

- Description: Coupling between 2 Hycleen Automation power supply and communication cable
- Connection: plug M12

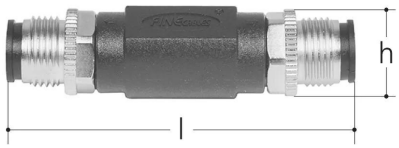

About GF Hycleen AS coupling

Specification


- Balancing valves: DN 15, 20, 25
- Flush valves: DN 15 & 20
- Central control interface with touch-screen
- Operating pressure: to 10 bar
- Operating temperature: +5°C to +90°C
- Materials: Gunmetal, Stainless steel, Plastics

Application

- Balancing of potable water hot circulation systems
- Ensure water exchange in potable water hot & cold pipe sections
- For buildings with complex water installations
- Ideal for retro-fit where existing installations experience poor hot water supply to outlets

GF Hycleen AS coupling M12-M12

1149716

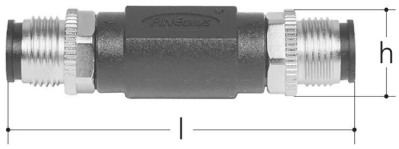

Status

Item Available From date	2026-03-01

Product code

Item no EAN	7613263105424
Item no GF	351110586
Item no GTIN	07613263105424
Item no LVI	2075253
Item no RSK	4893326

Dimensions

Item Unit Height	16
Item Unit Length	58
Item Unit Weight	0,014
Item Unit Width	16
Item_UOM	pce

Measurements

LENGTH_L	58
Z Measurement h	14

Packaging

Packaging GTIN PL1	06414900170888
Packaging Height PL1	15
Packaging Length PL1	130
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,00016575
Packaging Weight PL1	0,015
Packaging Width PL1	85

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+