


GF Hycleen AS flush valve LegioTherm K DN15

1149719

- Temperature: max. 90°C
- Nominal pressure: PN10
- Material: gunmetal lead-free, stainless steel, EPDM
- Factory setting: 20°C (adjustable 0 - 90°C)
- Connection: screw connection
- Note: Flushing valve JRG LegioTherm K must not be used without the consent of the holder of patents EP 1 845 207 B1 and DE 10 2006 017 807 B4 for use in a water system of the type described in these patents.

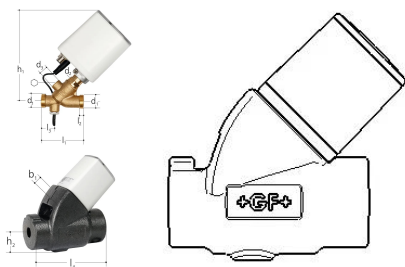

About GF Hycleen AS flush valve LegioTherm K

Specification


- Balancing valves: DN 15, 20, 25
- Flush valves: DN 15 & 20
- Central control interface with touch-screen
- Operating pressure: to 10 bar
- Operating temperature: +5°C to +90°C
- Materials: Gunmetal, Stainless steel, Plastics

Application

- Balancing of potable water hot circulation systems
- Ensure water exchange in potable water hot & cold pipe sections
- For buildings with complex water installations
- Ideal for retro-fit where existing installations experience poor hot water supply to outlets

GF Hycleen AS flush valve LegioTherm K DN15

1149719

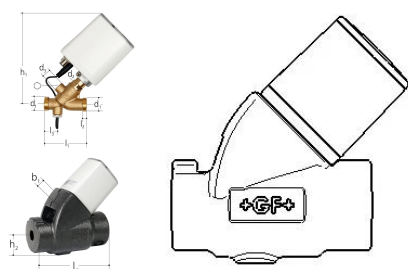

Status

Item Available From date 2026-03-01

Product code

Item no EAN	7613263104496
Item no GF	351110600
Item no GTIN	07613263104496
Item no LVI	2075249
Item no RSK	4883144

Dimensions

Item Unit Height	158
Item Unit Length	296
Item Unit Weight	0,81
Item Unit Width	175
Item_UOM	pce

Measurements

Length (l1)	75
Length (l2)	6
Length (l3)	24
Z Measurement h1	162
Z Measurement h2	50

Packaging

Packaging GTIN PL1	06414900170918
Packaging Height PL1	158
Packaging Length PL1	296
Packaging Quantity PL1	1
Packaging Type PL1	Plastic_Bag
Packaging Volume PL1	0,0081844
Packaging Weight PL1	0,818

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb